

## T5 FHE Luxline Plus

14W/T5/865 FHE  
0002762



### PRODUCT OVERVIEW

IPC Code	0002762
Product name	14W/T5/865 FHE
Technology	Fluorescent
Watt (Rated) (W)	14
Lamp shape	Tubular shape
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
Certifications	EUERL002
ETIM Class	EC000108
E-number FI	4944500
E-number SE	8356506
E-number Norway	3800982
Luminous flux (lm)	1100
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	80
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	85
Wattage (W)	14.00
Product Voltage (V)	82
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027623

### DATA TABLE

#### General data

IPC Code	0002762
Product name	14W/T5/865 FHE
Technology	Fluorescent
Watt (Rated) (W)	14
Lamp shape	Tubular shape
Cap/Base	G5
Lamp finish	Frosted/Coated

## T5 FHE Luxline Plus

14W/T5/865 FHE  
0002762

Fixture rating	Open
General application	Education,Hospitality,Logistics & Industry,Museums & Galleries,Office,Retail,Residential & Consumer
Certifications	EUERL002
ETIM Class	EC000108
E-number FI	4944500
E-number SE	8356506
E-number Norway	3800982

### Optical data

Luminous flux (lm)	1100
Luminous flux (Rated) (lm)	1100
Luminous flux (Nominal) at 35°C (lm)	1250
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	80
Rated lamp efficacy 100h 50Hz at optimum temp. (lm/W)	89.29
Rated lamp efficacy 100h HF at 25°C (lm/W)	80.00
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	6500
Light colour	Daylight
Colour Code	865
CRI (Ra)	85
Adjustable chromaticity	N
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

### Electrical data

Wattage (W)	14.00
Watt (Rated) - High frequency (W)	13.80
Current (A)	0.170
Product Voltage (V)	82
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	170
Lamp Energy Label (class)	A+
kWh per 1000 hours burning time	16

## T5 FHE Luxline Plus

14W/T5/865 FHE  
0002762

### Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

### Physical data

Nominal Product Length (mm)	550.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	549.0
Length base to pin Min-Max (mm) - B	553.7-556.1
Max. Lamp Length (mm) - C/L	563.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.043

### Packaging


Single packaging type	Carton
Product EAN number	5410288027623
Packaging single length / height (cm)	56.4
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027620
Units per outer package	25
Packaging outer length / height (cm)	57.8
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

### Safety data

Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Intended purpose	General lighting
Suitable for household illumination	Yes

## PHOTOMETRY

T5 FHE Luxline Plus  
14W/T5/865 FHE  
0002762

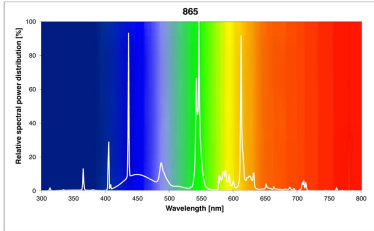

## TECHNICAL DRAWINGS



**ENERG** Y IJA  
IE IA  
енергия · ενεργεια

**SYLVANIA** 0002762

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**

**A+**

**16 kWh/1000h**