

T5 FHE Luxline Plus

21W/T5/830 FHE
0002763



Product features

- T5 FHE Luxline Plus



PRODUCT OVERVIEW

IPC Code	0002763
Product name	21W/T5/830 FHE
Technology	Fluorescent
Watt (Rated) (W)	21
Lamp shape	Tubular shape
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
Certifications	EUERL002
ETIM Class	EC000108
E-number FI	4944213
E-number SE	8356510
E-number Norway	3800902
Luminous flux (lm)	1900
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	92
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Wattage (W)	21.00
Product Voltage (V)	123
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027630

DATA TABLE

General data

IPC Code	0002763
Product name	21W/T5/830 FHE
Technology	Fluorescent
Watt (Rated) (W)	21
Lamp shape	Tubular shape
Cap/Base	G5
Lamp finish	Frosted/Coated

T5 FHE Luxline Plus

21W/T5/830 FHE
0002763

Fixture rating	Open
General application	Education,Hospitality,Logistics & Industry,Museums & Galleries,Office,Retail,Residential & Consumer
Certifications	EUERL002
ETIM Class	EC000108
E-number FI	4944213
E-number SE	8356510
E-number Norway	3800902

Optical data

Luminous flux (lm)	1900
Luminous flux (Rated) (lm)	1900
Luminous flux (Nominal) at 35°C (lm)	2100
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	92
Rated lamp efficacy 100h 50Hz at optimum temp. (lm/W)	100
Rated lamp efficacy 100h HF at 25°C (lm/W)	92.00
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	85
Adjustable chromaticity	N
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

Electrical data

Wattage (W)	21.00
Watt (Rated) - High frequency (W)	20.70
Current (A)	0.170
Product Voltage (V)	123
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	170
Lamp Energy Label (class)	A+
kWh per 1000 hours burning time	23

T5 FHE Luxline Plus

21W/T5/830 FHE
0002763

Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

Physical data

Nominal Product Length (mm)	850.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	849.0
Length base to pin Min-Max (mm) - B	853.7-856.1
Max. Lamp Length (mm) - C/L	863.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.064

Packaging


Single packaging type	Carton
Product EAN number	5410288027630
Packaging single length / height (cm)	86.2
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027637
Units per outer package	25
Packaging outer length / height (cm)	87.6
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

Safety data

Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Intended purpose	General lighting
Suitable for household illumination	Yes


PHOTOMETRY

T5 FHE Luxline Plus
21W/T5/830 FHE
0002763

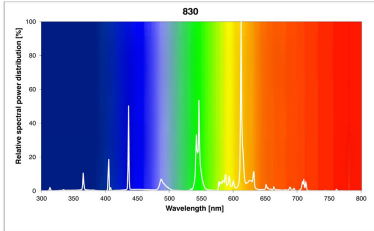

TECHNICAL DRAWINGS



 **ENERG** Y IJA
IE IA
енергия · ενεργεια

SYLVANIA 0002763

A⁺⁺
A⁺ **A⁺**
A
B
C
D
E

23 kWh/1000h