

T5 FHE Luxline Plus

21W/T5/865 FHE
0002765



PRODUCT OVERVIEW

IPC Code	0002765
Product name	21W/T5/865 FHE
Technology	Fluorescent
Watt (Rated) (W)	21
Lamp shape	Tubular shape
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
Certifications	EUERL002
ETIM Class	EC000108
E-number FI	4944502
E-number SE	8356514
E-number Norway	3800983
Luminous flux (lm)	1750
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	85
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	85
Wattage (W)	21.00
Product Voltage (V)	123
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027654

DATA TABLE

General data

IPC Code	0002765
Product name	21W/T5/865 FHE
Technology	Fluorescent
Watt (Rated) (W)	21
Lamp shape	Tubular shape
Cap/Base	G5
Lamp finish	Frosted/Coated

T5 FHE Luxline Plus

21W/T5/865 FHE
0002765

Fixture rating	Open
General application	Education,Hospitality,Logistics & Industry,Museums & Galleries,Office,Retail,Residential & Consumer
Certifications	EUERL002
ETIM Class	EC000108
E-number FI	4944502
E-number SE	8356514
E-number Norway	3800983

Optical data

Luminous flux (lm)	1750
Luminous flux (Rated) (lm)	1750
Luminous flux (Nominal) at 35°C (lm)	1950
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	85
Rated lamp efficacy 100h 50Hz at optimum temp. (lm/W)	92.86
Rated lamp efficacy 100h HF at 25°C (lm/W)	85.00
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	6500
Light colour	Daylight
Colour Code	865
CRI (Ra)	85
Adjustable chromaticity	N
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

Electrical data

Wattage (W)	21.00
Watt (Rated) - High frequency (W)	20.70
Current (A)	0.170
Product Voltage (V)	123
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	170
Lamp Energy Label (class)	A+
kWh per 1000 hours burning time	23

T5 FHE Luxline Plus

21W/T5/865 FHE

0002765

Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

Physical data

Nominal Product Length (mm)	850.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	849.0
Length base to pin Min-Max (mm) - B	853.7-856.1
Max. Lamp Length (mm) - C/L	863.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.064

Packaging


Single packaging type	Carton
Product EAN number	5410288027654
Packaging single length / height (cm)	86.2
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027651
Units per outer package	25
Packaging outer length / height (cm)	87.6
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

Safety data

Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Intended purpose	General lighting
Suitable for household illumination	Yes

PHOTOMETRY

T5 FHE Luxline Plus
21W/T5/865 FHE
0002765

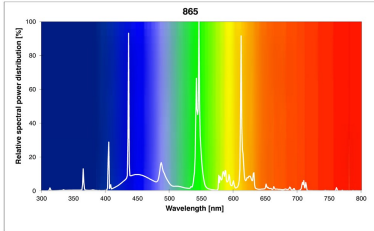

TECHNICAL DRAWINGS

