

HSL-BW 80W E27 BASIC

SA HSL-BW 80W E27 BASIC SLV

0020443



Range features



PRODUCT OVERVIEW

Ordering number	0020443
Light colour	840 Cool White
Technology	HID
Energy class	B
Average life (Rated) (h)	10000
Lamp finish	Coated
Dimmable	No
Cap/Base	E27
Type	HSL-BW
EAN code	5410288204437
CRI (Ra)	>40
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	3500
Efficacy (Rated) (lm/w)	44
Watt (Nominal) (W)	80
Voltage (V)	115

HSL-BW 80W E27 BASIC

SA HSL-BW 80W E27 BASIC SLV

0020443

DATA TABLE

General data

Ordering number	0020443
Technology	HID
Energy class	B
Average life (Nominal) (h)	10000
Average life (Rated) (h)	10000
Lamp finish	Coated
Dimmable	No
Cap/Base	E27
Type	HSL-BW
EAN code	5410288204437
Product name	SA HSL-BW 80W E27 BASIC SLV
Lamp mercury content (mg)	20
Intended purpose	General lighting
Special purpose lamp	No
Sales pack quantity	40
Rated survival factor at 2000 h	0.98
Rated survival factor at 2000 h 50Hz	0.98
Rated survival factor at 4000 h	0.95
Rated survival factor at 4000 h 50Hz	0.95
Rated survival factor at 6000 h	0.93
Rated survival factor at 6000 h 50Hz	0.93
Rated survival factor at 8000 h	0.8
Rated survival factor at 8000 h 50Hz	0.8

Optical data

Light colour	840 Cool White
CRI (Ra)	>40
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	3500
Luminous flux (Nominal) (lm)	3500
Ambient temperature for maximum luminous flux (°C)	25
Rated lumen maint. factor at 2000 h	0.88
Rated lumen maint. factor at 4000 h	0.83
Rated lumen maint. factor at 6000 h	0.75
Rated lumen maint. factor at 8000 h	0.65
Rated lumen maint. factor at 2000 h 50Hz	0.88
Rated lumen maint. factor at 4000 h 50Hz	0.83
Rated lumen maint. factor at 6000 h 50Hz	0.75
Rated lumen maint. factor at 8000 h 50Hz	0.65

HSL-BW 80W E27 BASIC

SA HSL-BW 80W E27 BASIC SLV

0020443

Electrical data

kWh per 1000 hours burning time	88
Efficacy (Rated) (lm/w)	44
Watt (Rated) (W)	80
Watt (Nominal) (W)	80
Voltage (V)	115
Ignition voltage (V)	0
Current (A)	0.8

Physical data


Weight (kg)	0.11
Lamp Length (mm) - C/L	166
Lamp Diameter (mm) - D	70
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H)	15.30 x 7.00 x 7.00
Outer package dimensions (L x W x H)	58.50 x 36.50 x 16.70

HSL-BW 80W E27 BASIC

SA HSL-BW 80W E27 BASIC SLV

0020443

TECHNICAL DRAWINGS

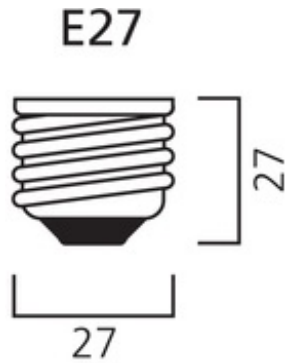

ENERGY LABEL

