

## Hi Spot 63 Superia Extrallfe

HI-SPOT 63 50W 230V FL SYLV

0021126



### Range features

- Halogen light without the need for a transformer
- Unique, patented, spiral faceted aluminised reflector
- 100% dimmable
- For use in mains voltage E27 cap downlights, spotlights and luminaires
- For accent or decorative lighting in retail, commercial and domestic applications
- Suitable for outdoor use when protected from direct contact with water
- Average rated life 2500hrs - 25% longer life than conventional PAR halogen lamps



### PRODUCT OVERVIEW

Ordering number	0021126
Light colour	0
Technology	Halogen
Energy class	D
Average life (Rated) (h)	3000
Lamp finish	Aluminium
Lamp shape	Reflector
Dimmable	Yes
Cap/Base	E27
Type	PAR 20
EAN code	5410288211268
CRI (Ra)	100
Beam angle(°)	25
Colour temperature (K)	2900
Useful luminous flux (Rated) (lm)	360
Watt (Nominal) (W)	50
Equivalent watt (W)	58
Voltage (V)	230

# Hi Spot 63 Superia Extrallfe

HI-SPOT 63 50W 230V FL SYLV

0021126

## DATA TABLE

### General data

<b>Ordering number</b>	0021126
<b>Technology</b>	Halogen
<b>Average life (Nominal) (h)</b>	3000
<b>Average life (Rated) (h)</b>	3000
<b>Energy saving lamp</b>	No
<b>Energy class</b>	D
<b>Lamp shape</b>	Reflector
<b>Lamp finish</b>	Aluminium
<b>Dimmable</b>	Yes
<b>Cap/Base</b>	E27
<b>Type</b>	PAR 20
<b>EAN code</b>	5410288211268
<b>Long description</b>	Halogen light without the need for a transformer. Unique, patented, spiral faceted aluminised reflector. 100% dimmable. For use in mains voltage E27 cap downlights, spotlights and luminaires. For accent or decorative lighting in retail, commercial and domestic applications. Suitable for outdoor use when protected from direct contact with water. Average rated life 2500hrs - 25% longer life than conventional PAR halogen lamps
<b>Product name</b>	HI-SPOT 63 50W 230V FL SYLV
<b>Lamp mercury content (mg)</b>	0
<b>Starting time (max) (s)</b>	0
<b>Warm-up time to 60% of full light (max) (s)</b>	Instant Full Light
<b>Control gear required</b>	No
<b>Fixture rating</b>	Open
<b>IEC Reference</b>	IEC 60357
<b>IEC Reference 2</b>	IEC 60432-3
<b>IEC Reference 3</b>	IEC 60630
<b>Intended purpose</b>	General lighting
<b>No. of switching cycles before premature failure (min)</b>	>12000
<b>Special purpose lamp</b>	No
<b>Transformer required</b>	No
<b>Sales pack quantity</b>	15

## Hi Spot 63 Superia Extrallfe

HI-SPOT 63 50W 230V FL SYLV

0021126

### Optical data

Light colour	0
CRI (Ra)	100
Beam angle (Rated) (°)	25
Suitable for accent lighting	Yes
Beam angle (°)	25
Colour temperature (K)	2900
Useful luminous flux (Rated) (lm)	360
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Nominal) (lm)	360
Peak intensity (cd)	1000

### Electrical data

kWh per 1000 hours burning time	50
Equivalent watt (W)	58
Watt (Rated) (W)	50
Watt (Nominal) (W)	50
Voltage (V)	230
Current (A)	0.22
Lamp power factor	1

### Physical data

Weight (kg)	0.11
Lamp Length (mm) - C/L	88
Lamp Diameter (mm) - D	63
Lamp dimension equal to filament lamp equivalent	Yes
Packaging outer width (cm)	25.50
Packaging outer length (cm)	42.50
Packaging outer height (cm)	10.50
Packaging single width (cm)	7.80
Packaging single length (cm)	8.70
Packaging single height (cm)	7.80
Designed for optimum use in non standard conditions	No


## Hi Spot 63 Superia Extrallfe

HI-SPOT 63 50W 230V FL SYLV



0021126

### PHOTOMETRY

#### Hi-Spot 63 / 50W



### TECHNICAL DRAWINGS

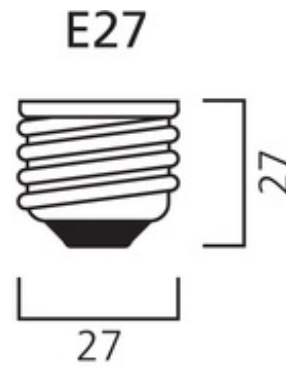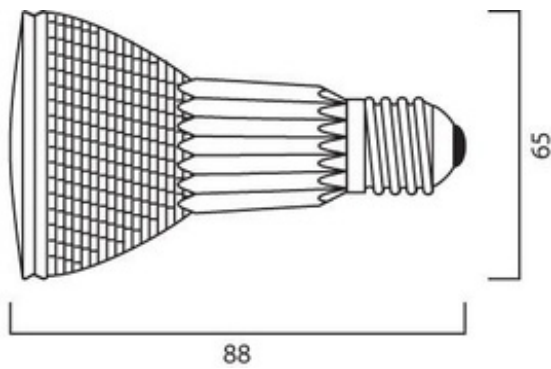

### ENERGY LABEL

