

Classic ECO Candle

Classic ECO Candle 42W E14 230V Sleeve

0023771



Range features

- 1:1 replacement of Incandescent Candle lamp
- More efficient - more savings
- Up to two times more average life compared to incandescent lamps = 2000 hours
- Excellent colour rendering (CRI = 100)
- Instant illumination
- Sparkling light output
- Less heat generation than incandescent lamp
- Less CO2 emissions
- Identical shape as standard incandescent lamp
- Commercial and domestic application
- 100% dimmable



PRODUCT OVERVIEW

Ordering number	0023771
Light colour	828 Homelight
Technology	Halogen
Energy class	D
Average life (Rated) (h)	2000
Lamp finish	Clear
Lamp shape	Candle
Dimmable	Yes
Cap/Base	E14
Type	Candle ECO
EAN code	5410288237718
CRI (Ra)	100
Beam angle(°)	na
Colour temperature (K)	2800
Luminous flux (Rated) (lm)	625
Watt (Nominal) (W)	42
Equivalent watt (W)	55
Voltage (V)	230

Classic ECO Candle

Classic ECO Candle 42W E14 230V Sleeve

0023771

DATA TABLE

General data

Ordering number	0023771
Technology	Halogen
Average life (Rated) (h)	2000
Average life (Nominal) (h)	2000
Energy saving lamp	No
Energy class	D
Lamp finish	Clear
Lamp shape	Candle
Dimmable	Yes
Cap/Base	E14
Type	Candle ECO
EAN code	5410288237718
Long description	1:1 replacement of Incandescent Candle lamp. More efficient - more savings. Up to two times more average life compared to incandescent lamps = 2000 hours. Excellent colour rendering (CRI = 100). Instant illumination. Sparkling light output. Less heat generation than incandescent lamp. Less CO2 emissions. Identical shape as standard incandescent lamp. Commercial and domestic application. 100% dimmable
Product name	Classic ECO Candle 42W E14 230V Sleeve
Lamp mercury content (mg)	0
Starting time (max) (s)	0.01
Warm-up time to 60% of full light (max) (s)	Instant full light
Control gear required	No
Fixture rating	Open
IEC Reference	IEC 60357
IEC Reference 2	IEC 60432-2
Intended purpose	General lighting
No. of switching cycles before premature failure (min)	> 8000
Special purpose lamp	No
Transformer required	No
Sales pack quantity	10
Optimal operating condition (°C)	25

Classic ECO Candle

Classic ECO Candle 42W E14 230V Sleeve

0023771

Optical data

Light colour	828 Homelight
CRI (Ra)	100
Suitable for accent lighting	No
Beam angle(°)	na
Colour temperature (K)	2800
Luminous flux (Rated) (lm)	625
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Nominal) (lm)	625

Electrical data

kWh per 1000 hours burning time	42
Watt (Rated) (W)	42
Watt (Nominal) (W)	42
Equivalent watt (W)	55
Voltage (V)	230
Lamp power factor	1

Physical data


Weight (kg)	0.02
Lamp Length (mm) - C/L	100
Lamp Diameter (mm) - D	36
Packaging outer width (cm)	21.50
Packaging outer length (cm)	43.00
Packaging outer height (cm)	25.00
Packaging single length (cm)	9.80
Packaging single width (cm)	3.50
Packaging single height (cm)	3.50

Classic ECO Candle

Classic ECO Candle 42W E14 230V Sleeve

0023771

TECHNICAL DRAWINGS

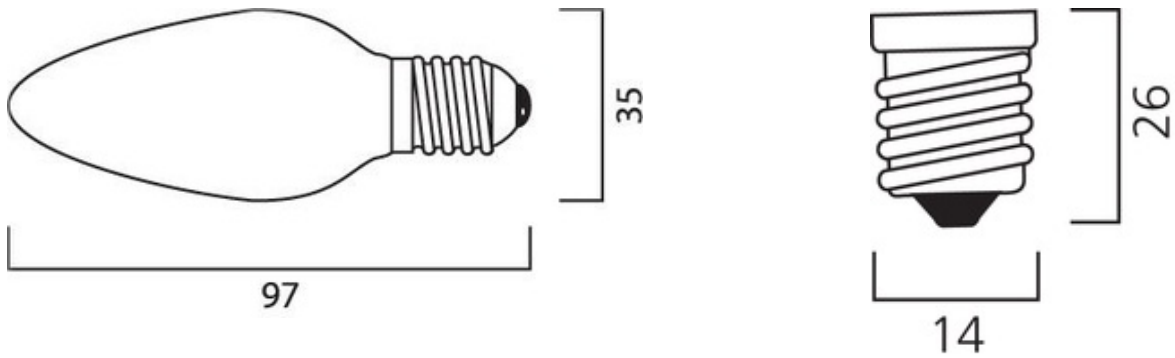

ENERGY LABEL

