

Mini-Lynx Compact Ball

BALL G45 9W E14 827 SLV

0031061



Range features

- Up to 80% energy saving compared to incandescent lamps
- Opal housing delivers all-round illumination whilst hiding burner design
- Provides a flicker-free start within 2 seconds
- Delivers 60% light in less than 1 minute
- No liquid mercury (<2.5mg pill)
- Good colour rendering (CRI=80)
- Available in Homelight (2700K)
- Average rated life 10,000 hrs
- To be used in dry applications or fully enclosed fixtures



PRODUCT OVERVIEW

Light colour	827 Homelight
Technology	Compact Fluorescent
Ordering number	0031061
Average life (Rated) (h)	10000
Energy class	A
Lamp shape	Ball
Lamp finish	frosted
Dimmable	No
Cap/Base	E14
Type	Mini-Lynx Ball
EAN code	5410288310619
CRI (Ra)	80
Colour temperature (K)	2700
Luminous flux (Rated) (lm)	432
Watt (Nominal) (W)	9
Equivalent watt (W)	40
Voltage (V)	230

Mini-Lynx Compact Ball

BALL G45 9W E14 827 SLV

0031061

DATA TABLE

General data

Dry applications use only	Yes
Technology	Compact Fluorescent
Ordering number	0031061
Energy saving lamp	Yes
Energy class	A
Average life (Rated) (h)	10000
Average life (Nominal) (h)	10000
Lamp finish	frosted
Lamp shape	Ball
Dimmable	No
Cap/Base	E14
Type	Mini-Lynx Ball
EAN code	5410288310619
E-number FI	4943634
E-number SE	8357846
Long description	Up to 80% energy saving compared to incandescent lamps. Opal housing delivers all-round illumination whilst hiding burner design. Provides a flicker-free start within 2 seconds. Delivers 60% light in less than 1 minute. No liquid mercury (<2.5mg pill). Good colour rendering (CRI=80). Available in Homelight (2700K). Average rated life 10,000 hrs. To be used in dry applications or fully enclosed fixtures
Product name	BALL G45 9W E14 827 SLV
Lamp mercury content (mg)	<2.5
Starting time (max) (s)	< 2.0
Warm-up time to 60% of full light (max) (s)	< 60 s
Control gear required	No
Burning position	Universal
IEC Reference	IEC 60968
IEC Reference 2	IEC 60969
IEC Reference 3	IEC 55015
ILCOS code	FBGH-9/27/1b-E14-50/103
Intended purpose	General lighting
No. of switching cycles before premature failure (min)	> 10000
Special purpose lamp	No
Transformer required	No
Sales pack quantity	10
Optimal operating condition (°C)	25° C, cap-up, Stated lumen output may vary if operated in non-standard position

Mini-Lynx Compact Ball

BALL G45 9W E14 827 SLV

0031061

Optical data

Light colour	827 Homelight
CRI (Ra)	80
Colour temperature (K)	2700
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Rated) (lm)	432
Luminous flux (Nominal) (lm)	432
Chromaticity coordinate Y	0.42
Chromaticity coordinate X	0.463

Electrical data

kWh per 1000 hours burning time	9
Equivalent watt (W)	40
Watt (Rated) (W)	9
Watt (Nominal) (W)	9
Voltage (V)	230
Current (A)	0.065
Lamp power factor	> 0.5

Physical data


Weight (kg)	0.03
Lamp Length (mm) - C/L	103
Lamp Diameter (mm) - D	50
Packaging outer width (cm)	34.00
Packaging outer length (cm)	47.70
Packaging outer height (cm)	33.40
Packaging single length (cm)	5.20
Packaging single width (cm)	5.20
Packaging single height (cm)	11.70

Mini-Lynx Compact Ball

BALL G45 9W E14 827 SLV

0031061

TECHNICAL DRAWINGS

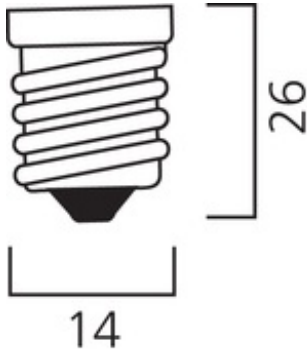

ENERGY LABEL

