

ML Compact 10K Candle 5W E14 840

ML CANDLE 10KHR 5W E14 840 SLV

0031473



Range features

- ML Compact 10K Candle 5W E14 840 Slv



PRODUCT OVERVIEW

Light colour	840 Cool White
Technology	Compact Fluorescent
Ordering number	0031473
Average life (Rated) (h)	10000
Energy class	A
Lamp shape	Candle
Lamp finish	Frosted
Dimmable	No
Cap/Base	E14
Type	Mini-Lynx Candle
EAN code	5410288314730
CRI (Ra)	80
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	230
Watt (Nominal) (W)	5
Equivalent watt (W)	25
Voltage (V)	230

ML Compact 10K Candle 5W E14 840

ML CANDLE 10KHR 5W E14 840 SLV

0031473

DATA TABLE

General data

Dry applications use only	Yes
Technology	Compact Fluorescent
Ordering number	0031473
Energy saving lamp	Yes
Energy class	A
Average life (Rated) (h)	10000
Average life (Nominal) (h)	10000
Lamp finish	Frosted
Lamp shape	Candle
Dimmable	No
Cap/Base	E14
Type	Mini-Lynx Candle
EAN code	5410288314730
E-number FI	4940168
E-number SE	8357931
Long description	ML Compact 10K Candle 5W E14 840 Slv
Product name	ML CANDLE 10KHR 5W E14 840 SLV
Lamp mercury content (mg)	<2.5
Starting time (max) (s)	< 2.0
Warm-up time to 60% of full light (max) (s)	120 s
Control gear required	No
Burning position	Universal
IEC Reference	IEC 60968
IEC Reference 2	IEC 60969
IEC Reference 3	IEC 55015
ILCOS code	FBABH-5/40/1b-E14-39/101
Intended purpose	General lighting
No. of switching cycles before premature failure (min)	> 10000
Special purpose lamp	No
Transformer required	No
Sales pack quantity	10
Optimal operating condition (°C)	25° C, cap-up, Stated lumen output may vary if operated in non-standard position

ML Compact 10K Candle 5W E14 840

ML CANDLE 10KHR 5W E14 840 SLV

0031473

Optical data

Light colour	840 Cool White
CRI (Ra)	80
Colour temperature (K)	4000
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Rated) (lm)	230
Luminous flux (Nominal) (lm)	230
Chromaticity coordinate Y	0.38
Chromaticity coordinate X	0.38

Electrical data

kWh per 1000 hours burning time	5
Equivalent watt (W)	25
Watt (Rated) (W)	5
Watt (Nominal) (W)	5
Voltage (V)	230
Current (A)	0.043
Lamp power factor	> 0.5

Physical data


Weight (kg)	0.03
Lamp Length (mm) - C/L	101
Lamp Diameter (mm) - D	39
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H)	11.60 x 4.80 x 4.80
Inner package dimensions (L x W x H)	30.00 x 14.10 x 14.60
Inner package net weight (kg)	0.26
Outer package dimensions (L x W x H)	74.50 x 32.00 x 17.60

ML Compact 10K Candle 5W E14 840

ML CANDLE 10KHR 5W E14 840 SLV

0031473

TECHNICAL DRAWINGS

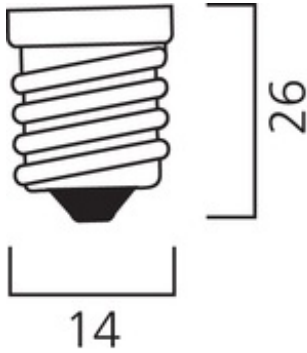

ENERGY LABEL

