

Syl-Lighter LED Square - 4,000K lamp

Sylighter 170 Square LED 12W NW

3031701



Range features



PRODUCT OVERVIEW

Technology	LED
Ordering number	3031701
Average life (Rated) (h)	40,000hrs
EAN code	8711971317012
CRI (Ra)	≈80
Beam angle(°)	78°
Colour temperature (K)	4.000
Luminous flux (lm)	826lm
Efficacy (Rated) (lm/w)	826lm
Voltage (V)	220-240V
Colour	RAL9016
Included lamp	Integrated LED
IP rating	44

Syl-Lighter LED Square - 4,000K lamp

Sylighter 170 Square LED 12W NW

3031701

DATA TABLE

General data

Technology	LED
Ordering number	3031701
Average life (Rated) (h)	40,000hrs
EAN code	8711971317012
E-number FI	4273646
E-number SE	7462136
Product name	Sylighter 170 Square LED 12W NW
Control gear availability	External
Control gear type	Electronic
Environment	Interior
General application	Indoor Corridors, Reception rooms, Foyers, Student Rooms, Bathrooms
Sales pack quantity	1

Optical data

CRI (Ra)	≥80
Beam angle(°)	78°
Colour temperature (K)	4.000
Luminous flux (lm)	826lm
Distribution type	Direct
Optical system	Aluminum Reflector

Electrical data

Efficacy (Rated) (lm/w)	826lm
Total power consumption (W)	12W
Voltage (V)	220-240V
Drive current (mA)	350mA
Total number of lamps	1

Syl-Lighter LED Square - 4,000K lamp

Sylighter 170 Square LED 12W NW

3031701

Physical data


Weight (kg)	0.65
Colour	RAL9016
Included lamp	Integrated LED
Lamp included	Yes
Height (mm)	68mm
Width (mm)	170mm
Length (mm)	170mm
IP rating	44
Cutout diameter (mm)	150mm x 150mm
Packaging outer height (cm)	19.50
Packaging outer length (cm)	65.50
Packaging outer width (cm)	19.50
Packaging single width (cm)	19.00
Packaging single length (cm)	21.00
Recessed depth (mm)	68mm
Packaging single height (cm)	8.50
Diffuser finish	Opal
Diffuser material	Polycarbonate

Syl-Lighter LED Square - 4,000K lamp

Sylighter 170 Square LED 12W NW

3031701

TECHNICAL DRAWINGS

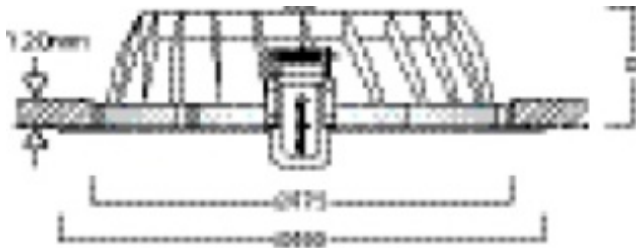

Syl-lighter LED 195