

Syl-Lighter LED Square - 4,000K lamp

Sylighter 225 Square LED 21W NW

3031705



Range features



PRODUCT OVERVIEW

Technology	LED
Ordering number	3031705
Average life (Rated) (h)	40,000hrs
EAN code	8711971317050
CRI (Ra)	=80
Beam angle(°)	85°
Colour temperature (K)	4.000
Luminous flux (lm)	1678lm
Efficacy (Rated) (lm/w)	1678lm
Voltage (V)	220-240V
Colour	RAL9016
Included lamp	Integrated LED
IP rating	44

Syl-Lighter LED Square - 4,000K lamp

*Sylighter 225 Square LED 21W NW***3031705****DATA TABLE**

General data

Technology	LED
Ordering number	3031705
Average life (Rated) (h)	40,000hrs
EAN code	8711971317050
E-number FI	4273652
E-number SE	7462140
Product name	Sylighter 225 Square LED 21W NW
Control gear availability	External
Control gear type	Electronic
Environment	Interior
General application	Indoor Corridors, Reception rooms, Foyers, Student Rooms, Bathrooms
Sales pack quantity	1

Optical data

CRI (Ra)	=80
Beam angle(°)	85°
Colour temperature (K)	4.000
Luminous flux (lm)	1678lm
Distribution type	Direct
Optical system	Aluminum Reflector

Electrical data

Efficacy (Rated) (lm/w)	1678lm
Total power consumption (W)	21W
Voltage (V)	220-240V
Drive current (mA)	500mA
Total number of lamps	1

Syl-Lighter LED Square - 4,000K lamp

Sylighter 225 Square LED 21W NW

3031705

Physical data


Weight (kg)	1.05
Colour	RAL9016
Included lamp	Integrated LED
Lamp included	Yes
Height (mm)	90mm
Width (mm)	225mm
Length (mm)	225mm
IP rating	44
Cutout diameter (mm)	205mm x 205mm
Packaging outer height (cm)	27.00
Packaging outer length (cm)	53.00
Packaging outer width (cm)	48.00
Packaging single width (cm)	23.00
Packaging single length (cm)	25.50
Recessed depth (mm)	90mm
Packaging single height (cm)	12.50
Diffuser finish	Opal
Diffuser material	Polycarbonate

Syl-Lighter LED Square - 4,000K lamp

Sylighter 225 Square LED 21W NW

3031705

TECHNICAL DRAWINGS

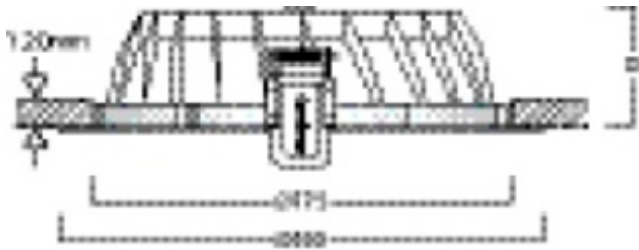

Syl-lighter LED 195