


NEW


CONCEPT 35

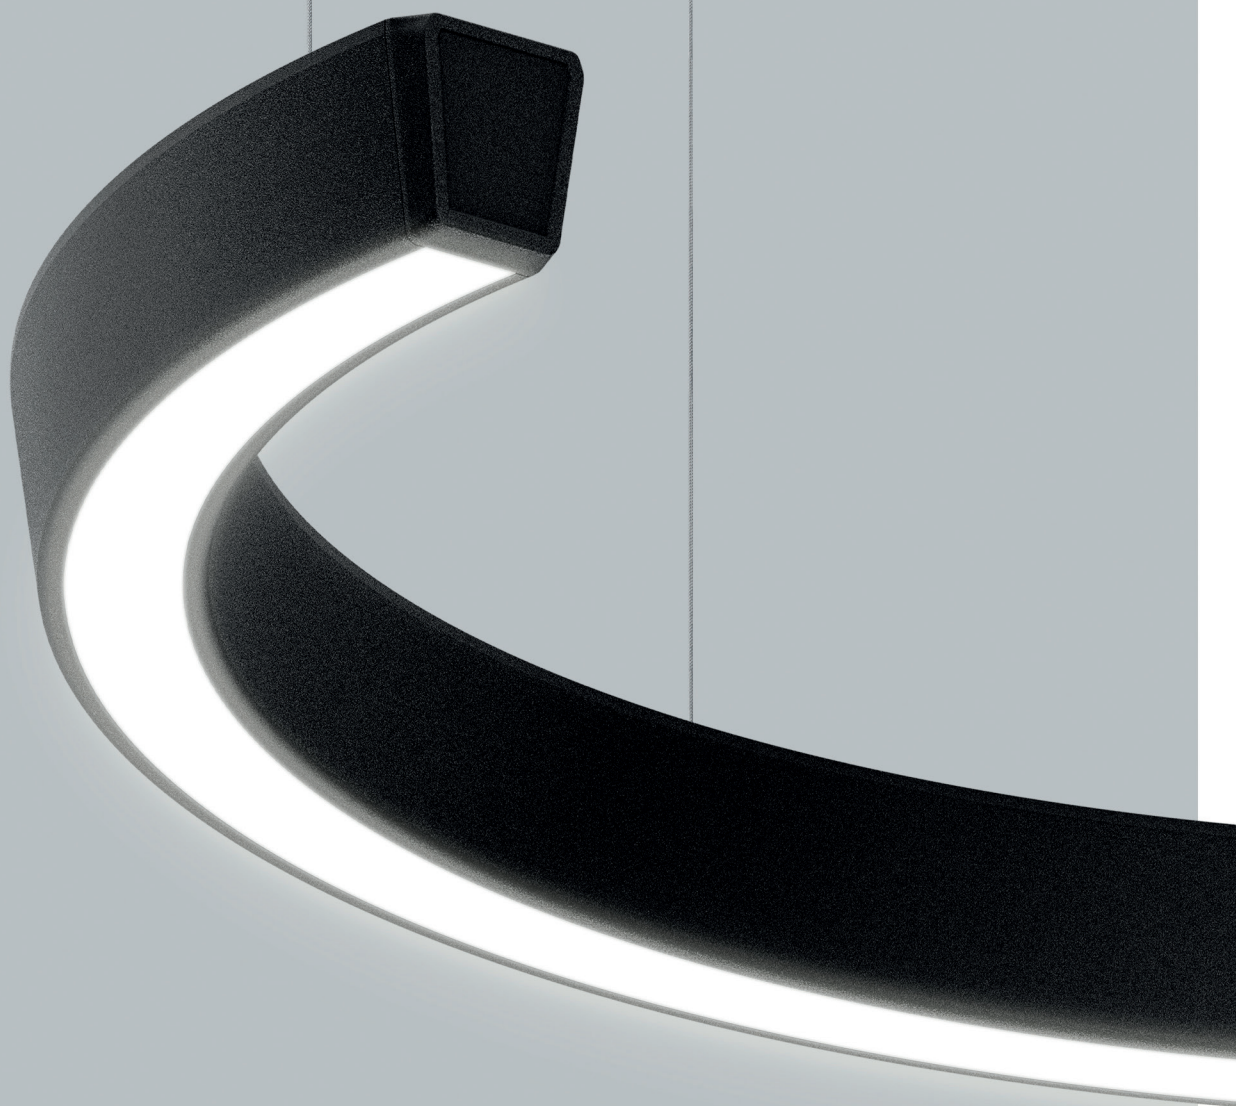

INDELAGUE GROUP

INDELAGUE ROXO lighting

OVERVIEW



Type of Application

| | |
|-----------------|---|
| Recessed | • |
| Surface Mounted | • |
| Suspended | • |
| Wall Mounted | • |

Light Distribution

| | |
|---------------------------|---|
| Direct | • |
| 80% Direct / 20% Indirect | • |

Straight Line Dimensions

| | |
|---------|---|
| 843 mm | • |
| 1124 mm | • |
| 1405 mm | • |
| 1686 mm | • |
| 1967 mm | • |
| 2248 mm | • |
| 2529 mm | • |
| 2810 mm | • |

Circular Dimensions

| | |
|----------|---|
| Ø455 mm | • |
| Ø777 mm | • |
| Ø1136 mm | • |
| Ø1494 mm | • |
| Ø1853 mm | • |
| Ø2569 mm | • |
| Ø2926 mm | • |
| Ø4000 mm | • |
| Ø5789 mm | • |
| Ø7936 mm | • |

Module Orientation

| | |
|---------------|---|
| Left | |
| Right | |
| Straight Line | • |

Optical System

| | |
|-------|---|
| bFLEX | • |
|-------|---|

Colour Temperature

| | |
|-------|---|
| 3000K | • |
| 4000K | • |

Finishes

| | |
|--|---|
| White; Grey; Black; Jungle; Sahara; Autumn; Golden Eye; Rusty Chain; Pure Chocolate; Mist; Dark Rock; Carbon; Blue; Green; Yellow; Red | • |
|--|---|

Ceiling Roses

| | |
|-----------------|---|
| Recessed | • |
| Surface Mounted | • |

End Caps Without Visible Screws

| | |
|--|---|
| | • |
|--|---|

Bespoke Projects

| | |
|--|---|
| | • |
|--|---|



1/16 (22,5°)


1/8 (45°)


1/4 (90°)


1/2 (180°)


1/1 (360°)



•
•
•
•

•
•
•
•

•
•
•
•

•
•
•
•

•
•
•
•

•
•

•
•

•
•

•
•

•
•

•
•
•
•

•
•
•
•
•

•
•
•
•
•

•

•
•
•
•

•
•

•
•

•
•

•
•

•

•

•

•

•

•
•

•
•

•
•

•
•

•
•

•

•

•

•

•

•
•

•
•

•
•

•
•

•
•

•

•

•

•

•

•

•

•

**A MODERN
LOOK
FOR YOUR
SPACE!**

1/16 (22,5°)



1/8 (45°)




1/4 (90°)





1/2 (180°)

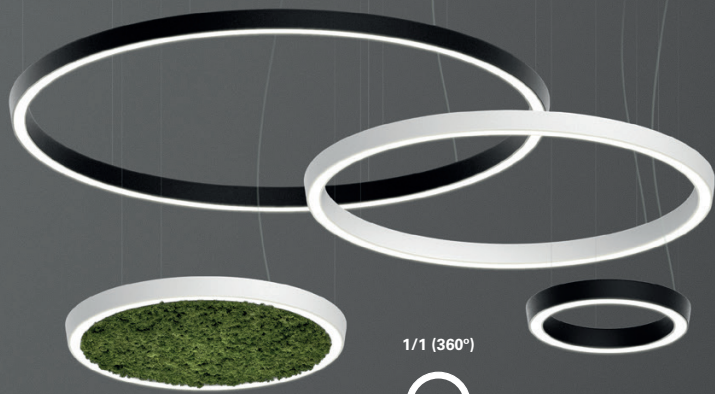


1/1 (360°)




LINEA



TYPES OF APPLICATION

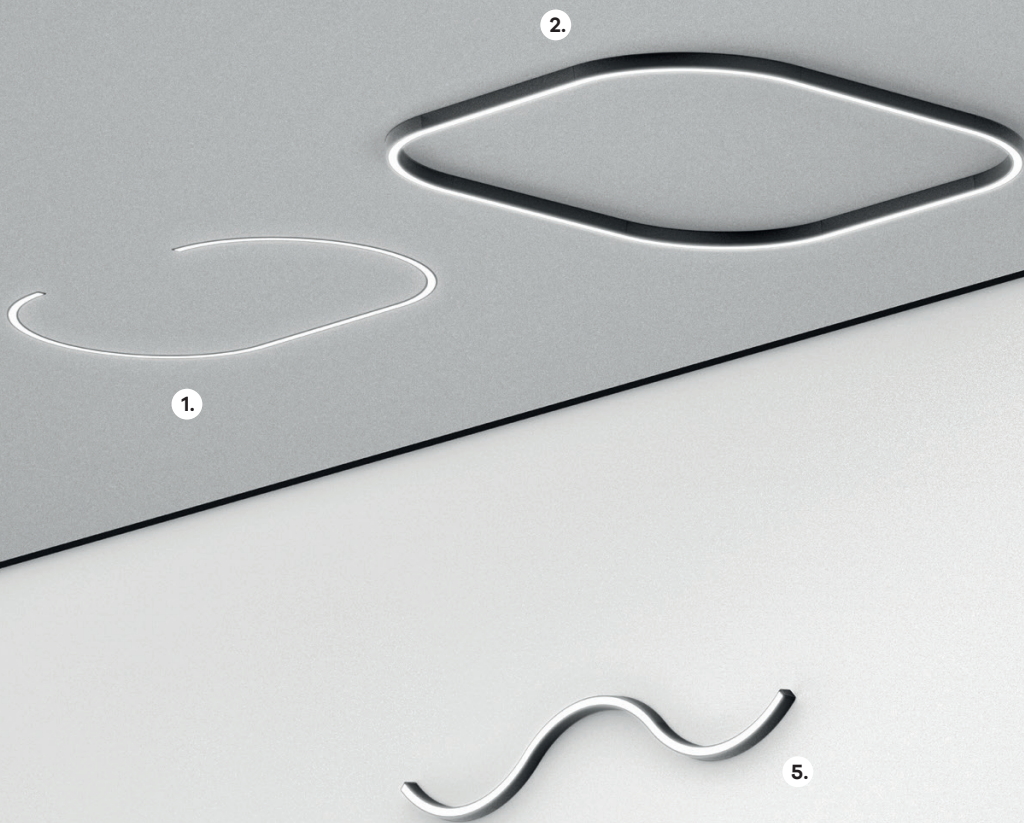

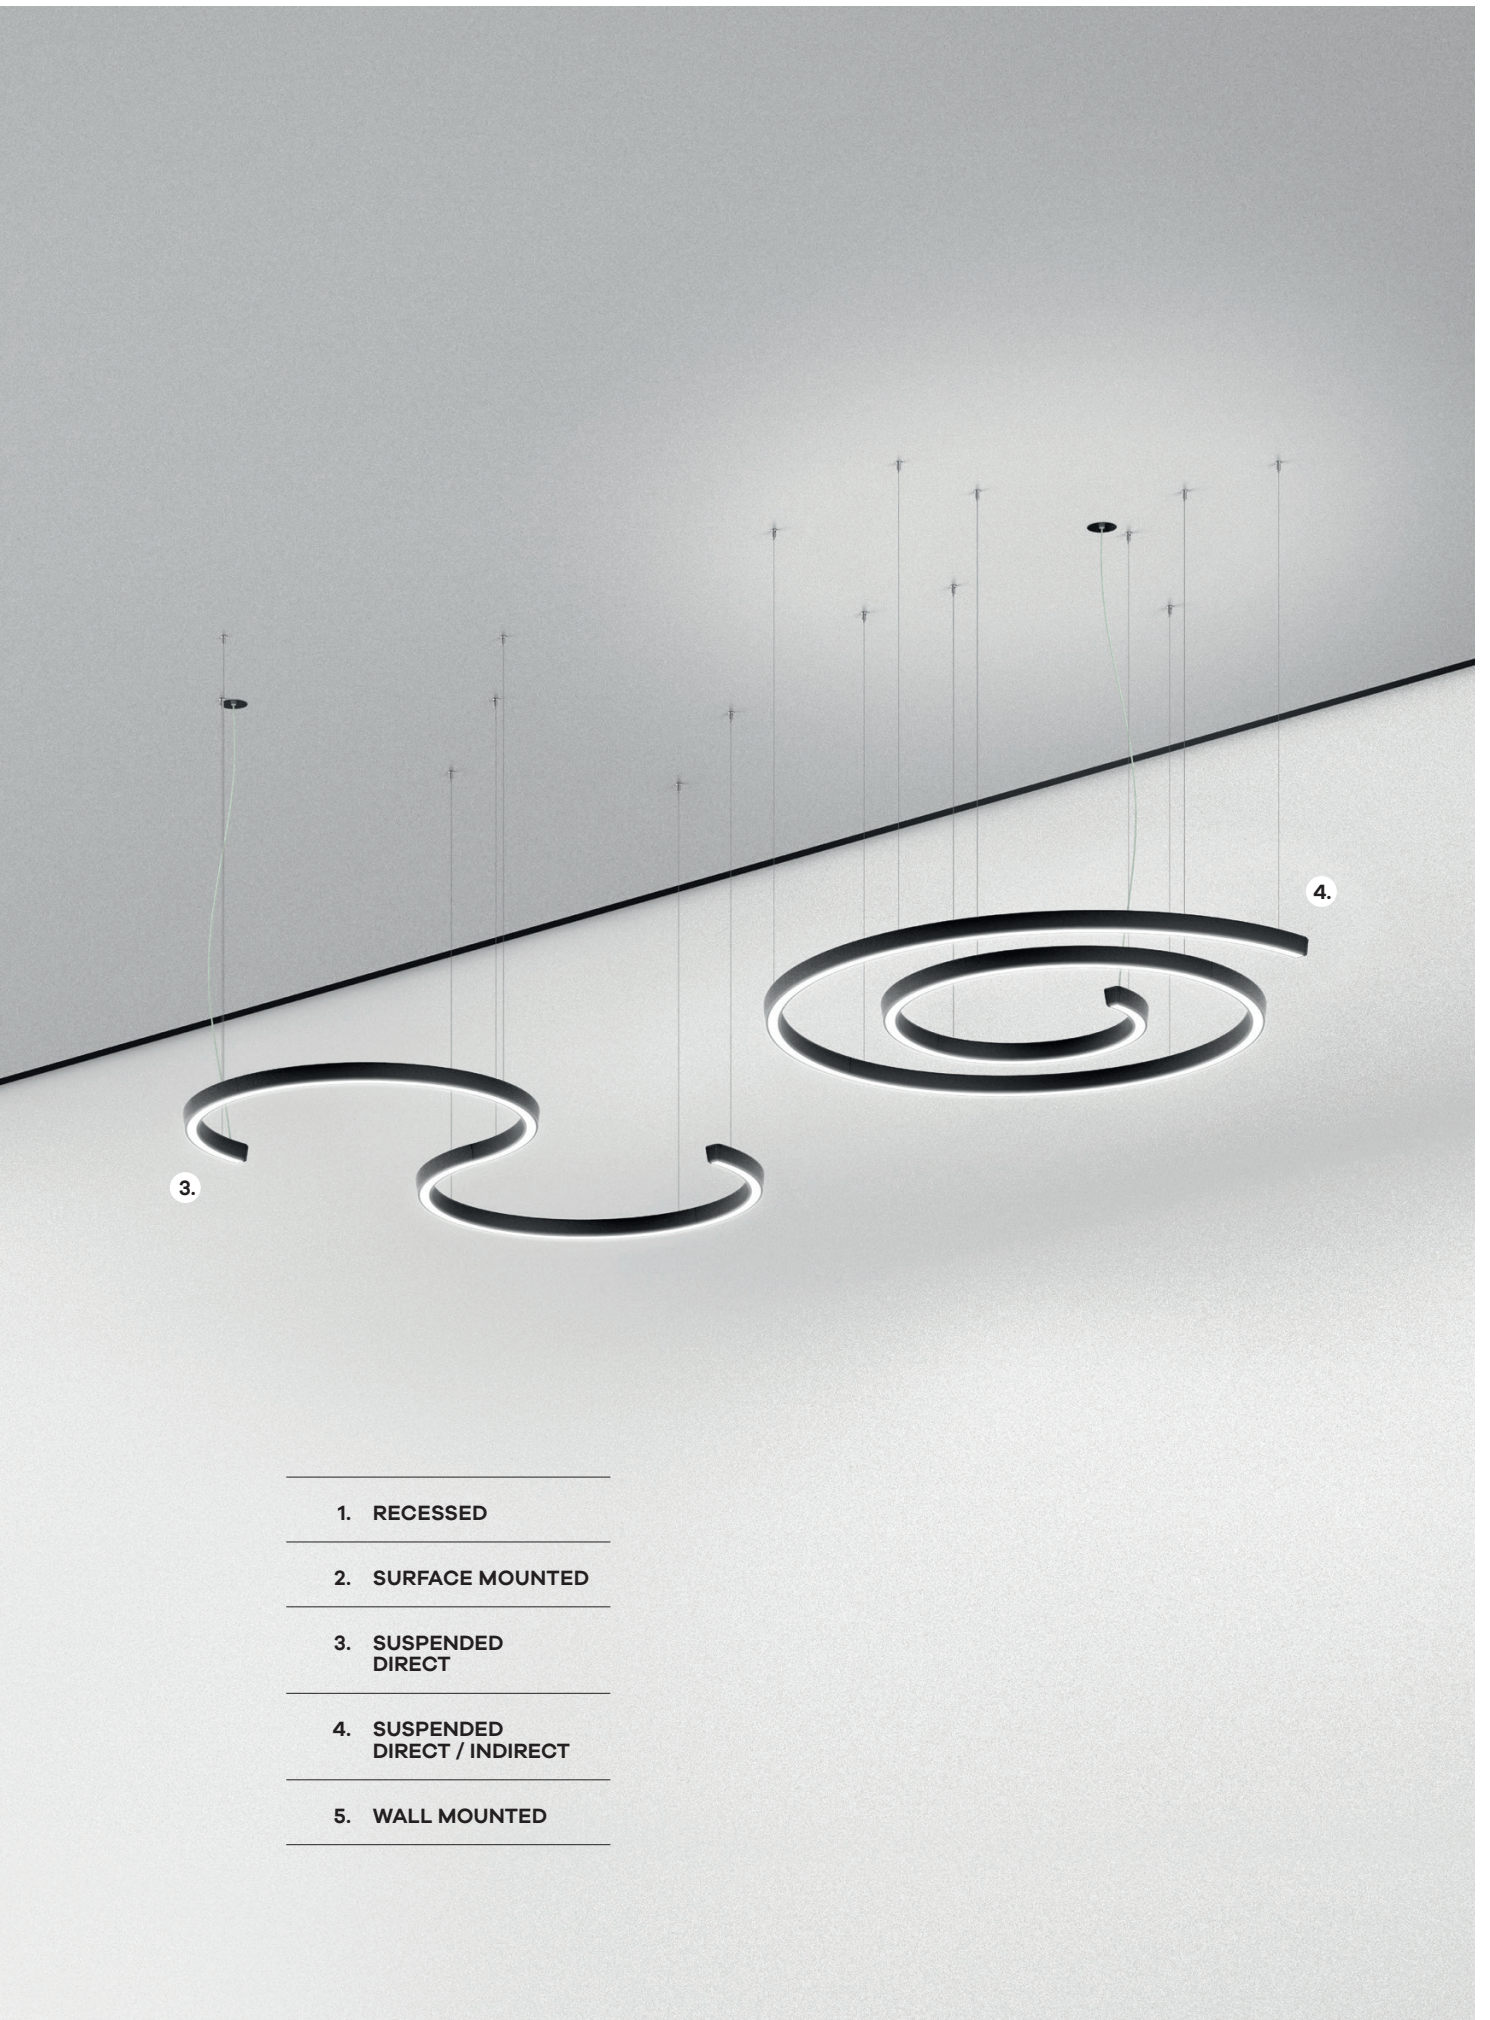

3.

4.

1. RECESSED

2. SURFACE MOUNTED

3. SUSPENDED
DIRECT


4. SUSPENDED
DIRECT / INDIRECT

5. WALL MOUNTED







HOW TO CREATE SPACES THROUGH LIGHT

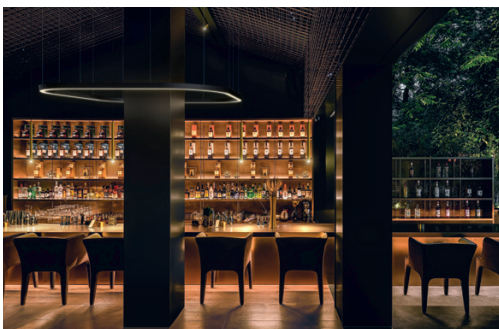


OPTICAL SYSTEM



bFLEX



Shown in real size

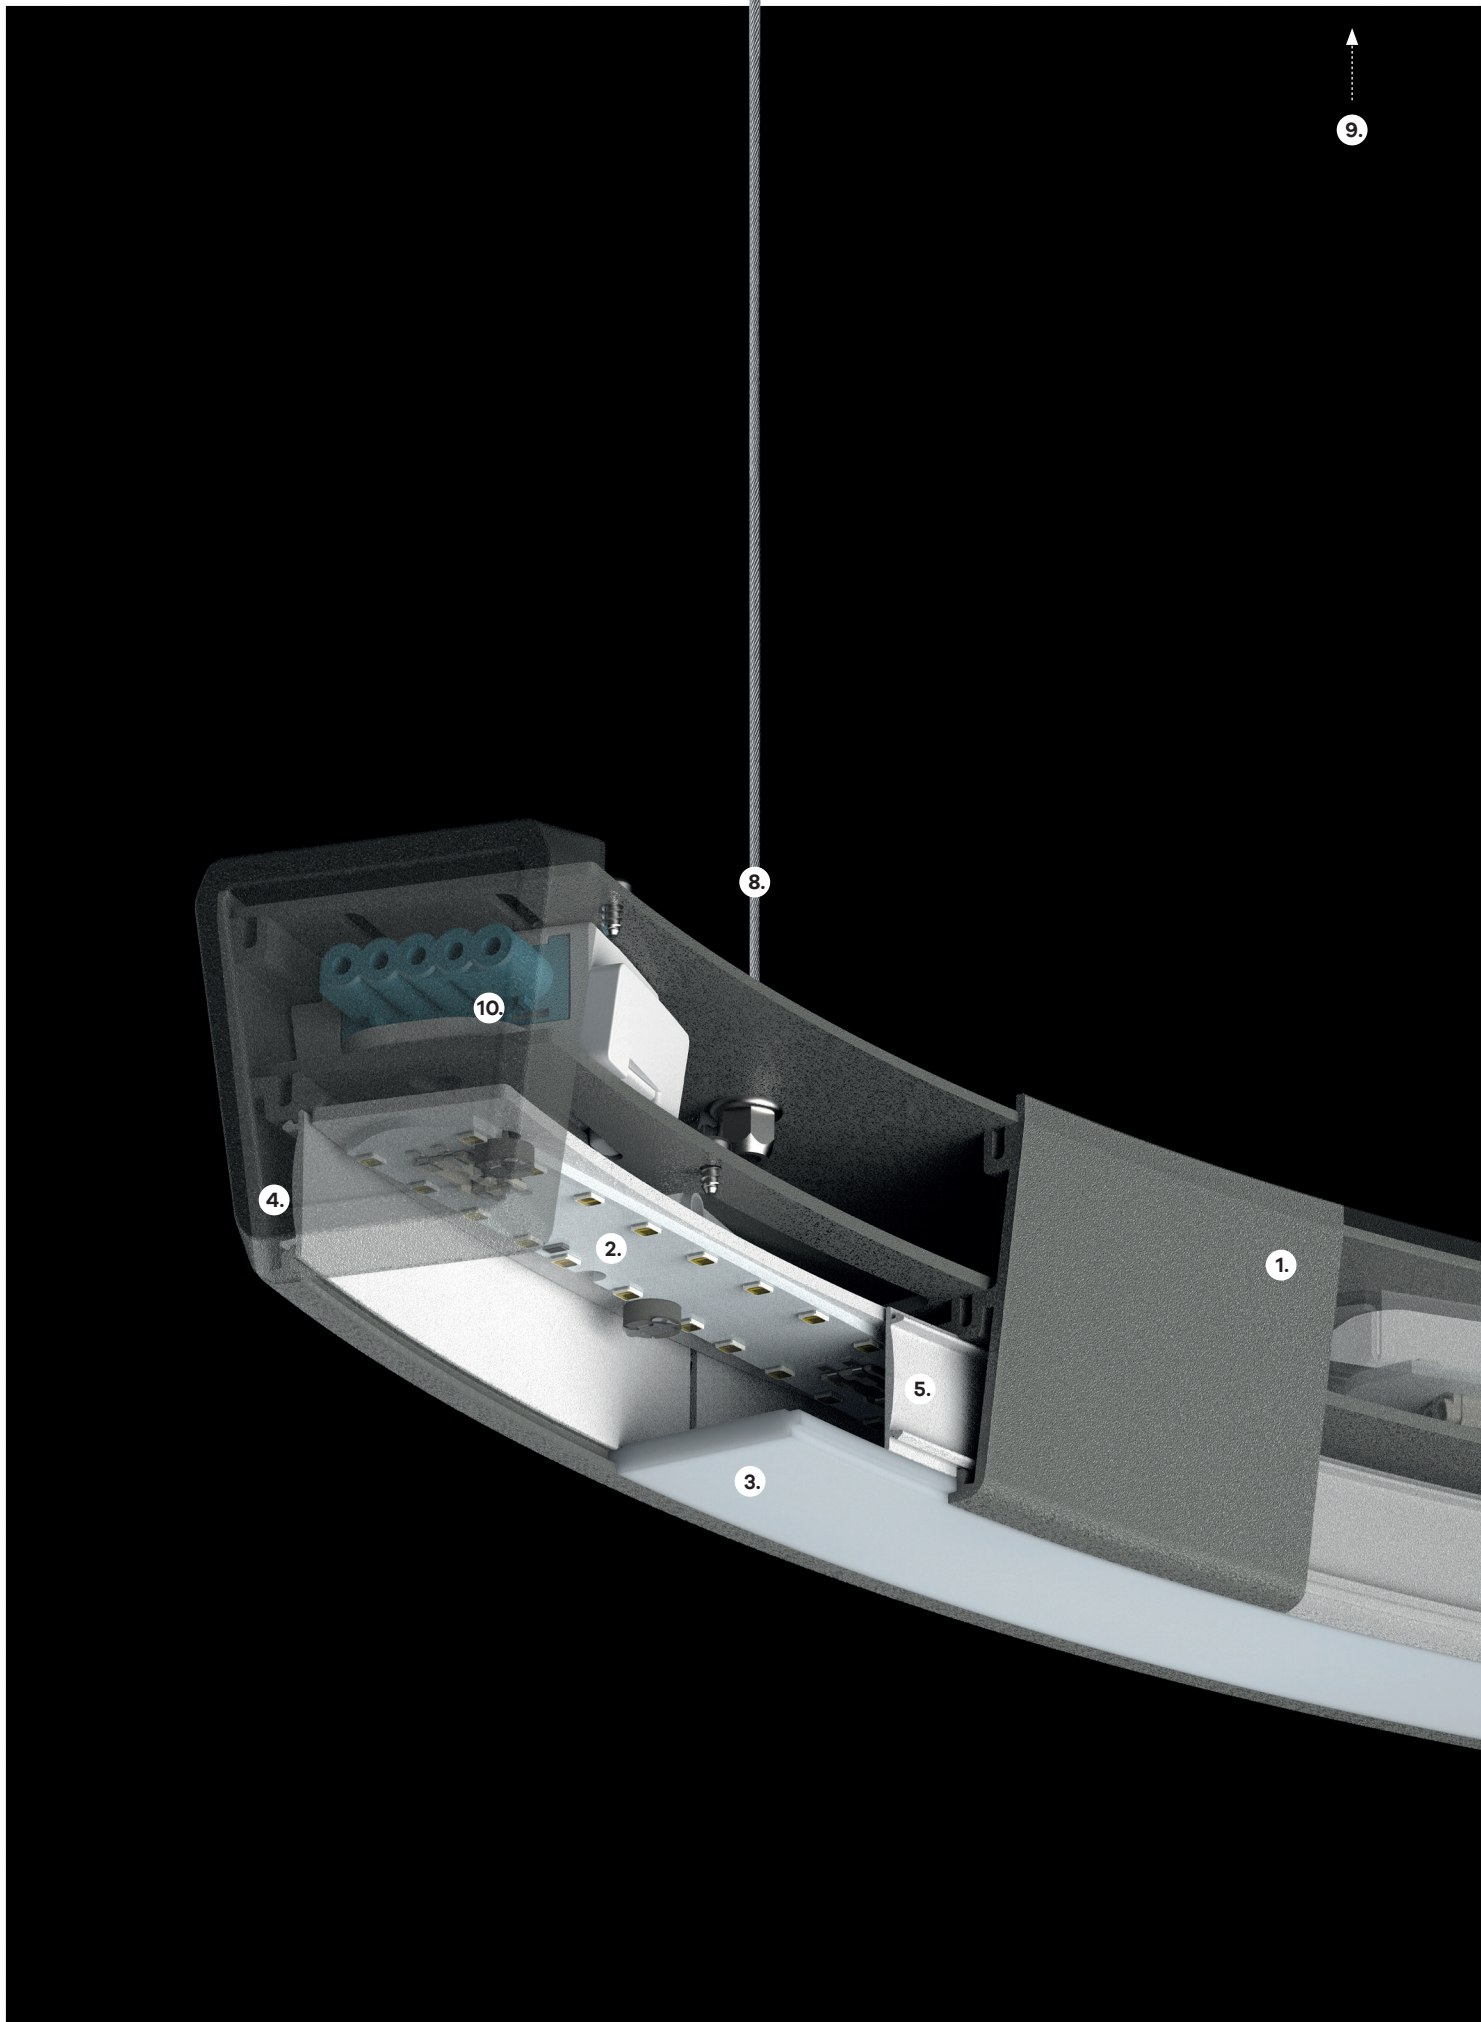

9.

8.

10.

4.

2.

5.

1.

3.

MINIMALISM AND TECHNOLOGY

1. BODY

Extruded aluminium profile, seamlessly welded. 16 finishes available.

2. LED

Binning initial MacAdam <3, colour temperature 3000K / 4000K, CRI>80, LED estimated life time 60.000h L90 B10.

3. bFLEX

High-tech optical system with opal (bFLEX) version to grant uniform soft light without visible spots. bFLEX is available in a continuous diffuser roll up to 30m.



4. END CAPS

Die-cast end caps with no light leakage. 16 finishes available.

5. HPR

Internal high performance reflector in order to grant high efficiency and uniform soft light.

6. INDIRECT LIGHT

Direct / indirect version with 80% / 20% light ratio and opal diffuser for ceiling light uniformity.

7. DALI OR HF DRIVER

8. SUSPENSION AND CURRENT SUPPLY CABLE

1,5m adjustable wire suspensions and current supply cable to be ordered separately. Also available in 3m, 4,5m or 6m.



9. CEILING ROSES

Recessed or surface mounted versions available. 16 finishes available to be ordered separately.



10. BODY CONNECTOR KIT

The two parts are perfectly connected so that there is no light leakage whether in a curved or straight line version. The body connector kit includes a WIELAND connector for an easier installation.

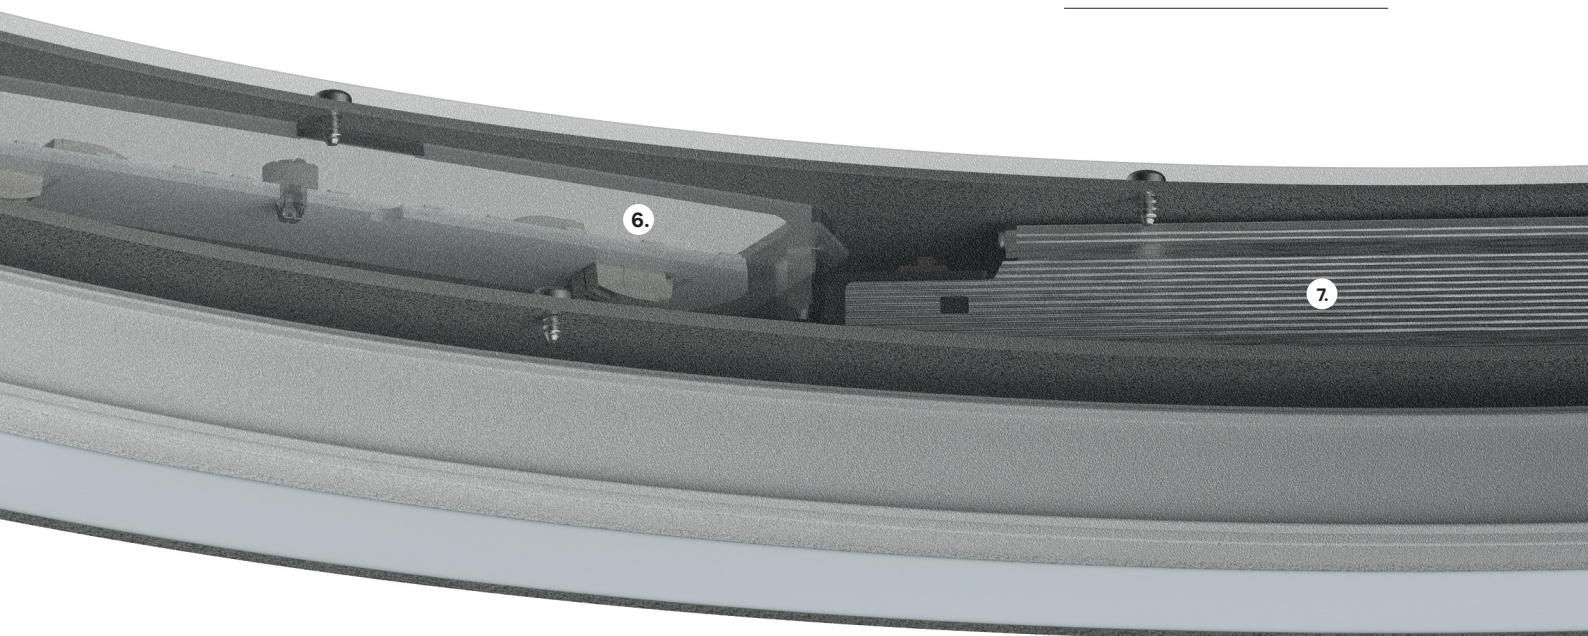

STRUCTURAL ELEMENTS COMPOSITION

1. END CAPS


2. LED MODULES


3. BODY CONNECTOR

4. CEILING
ROSES


5. CURRENT
SUPPLY CABLE

6. SUSPENSION

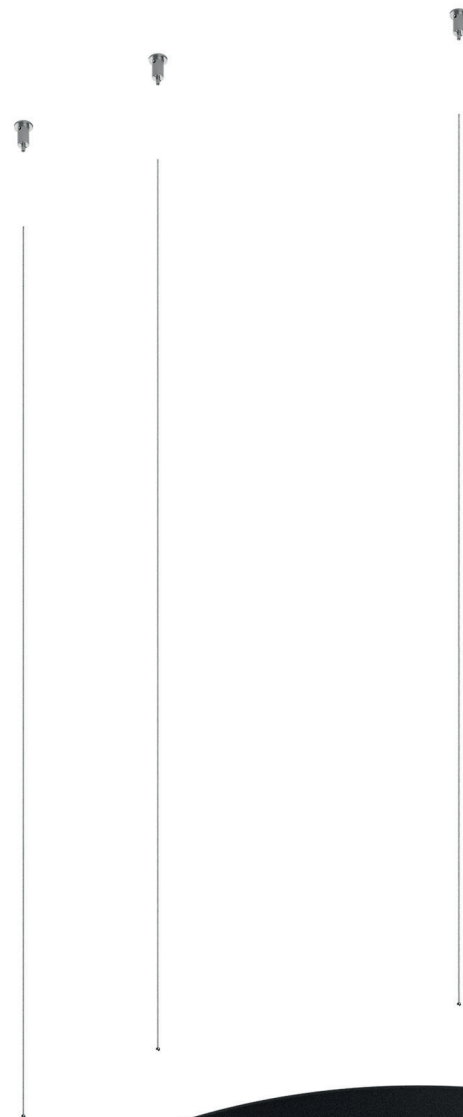


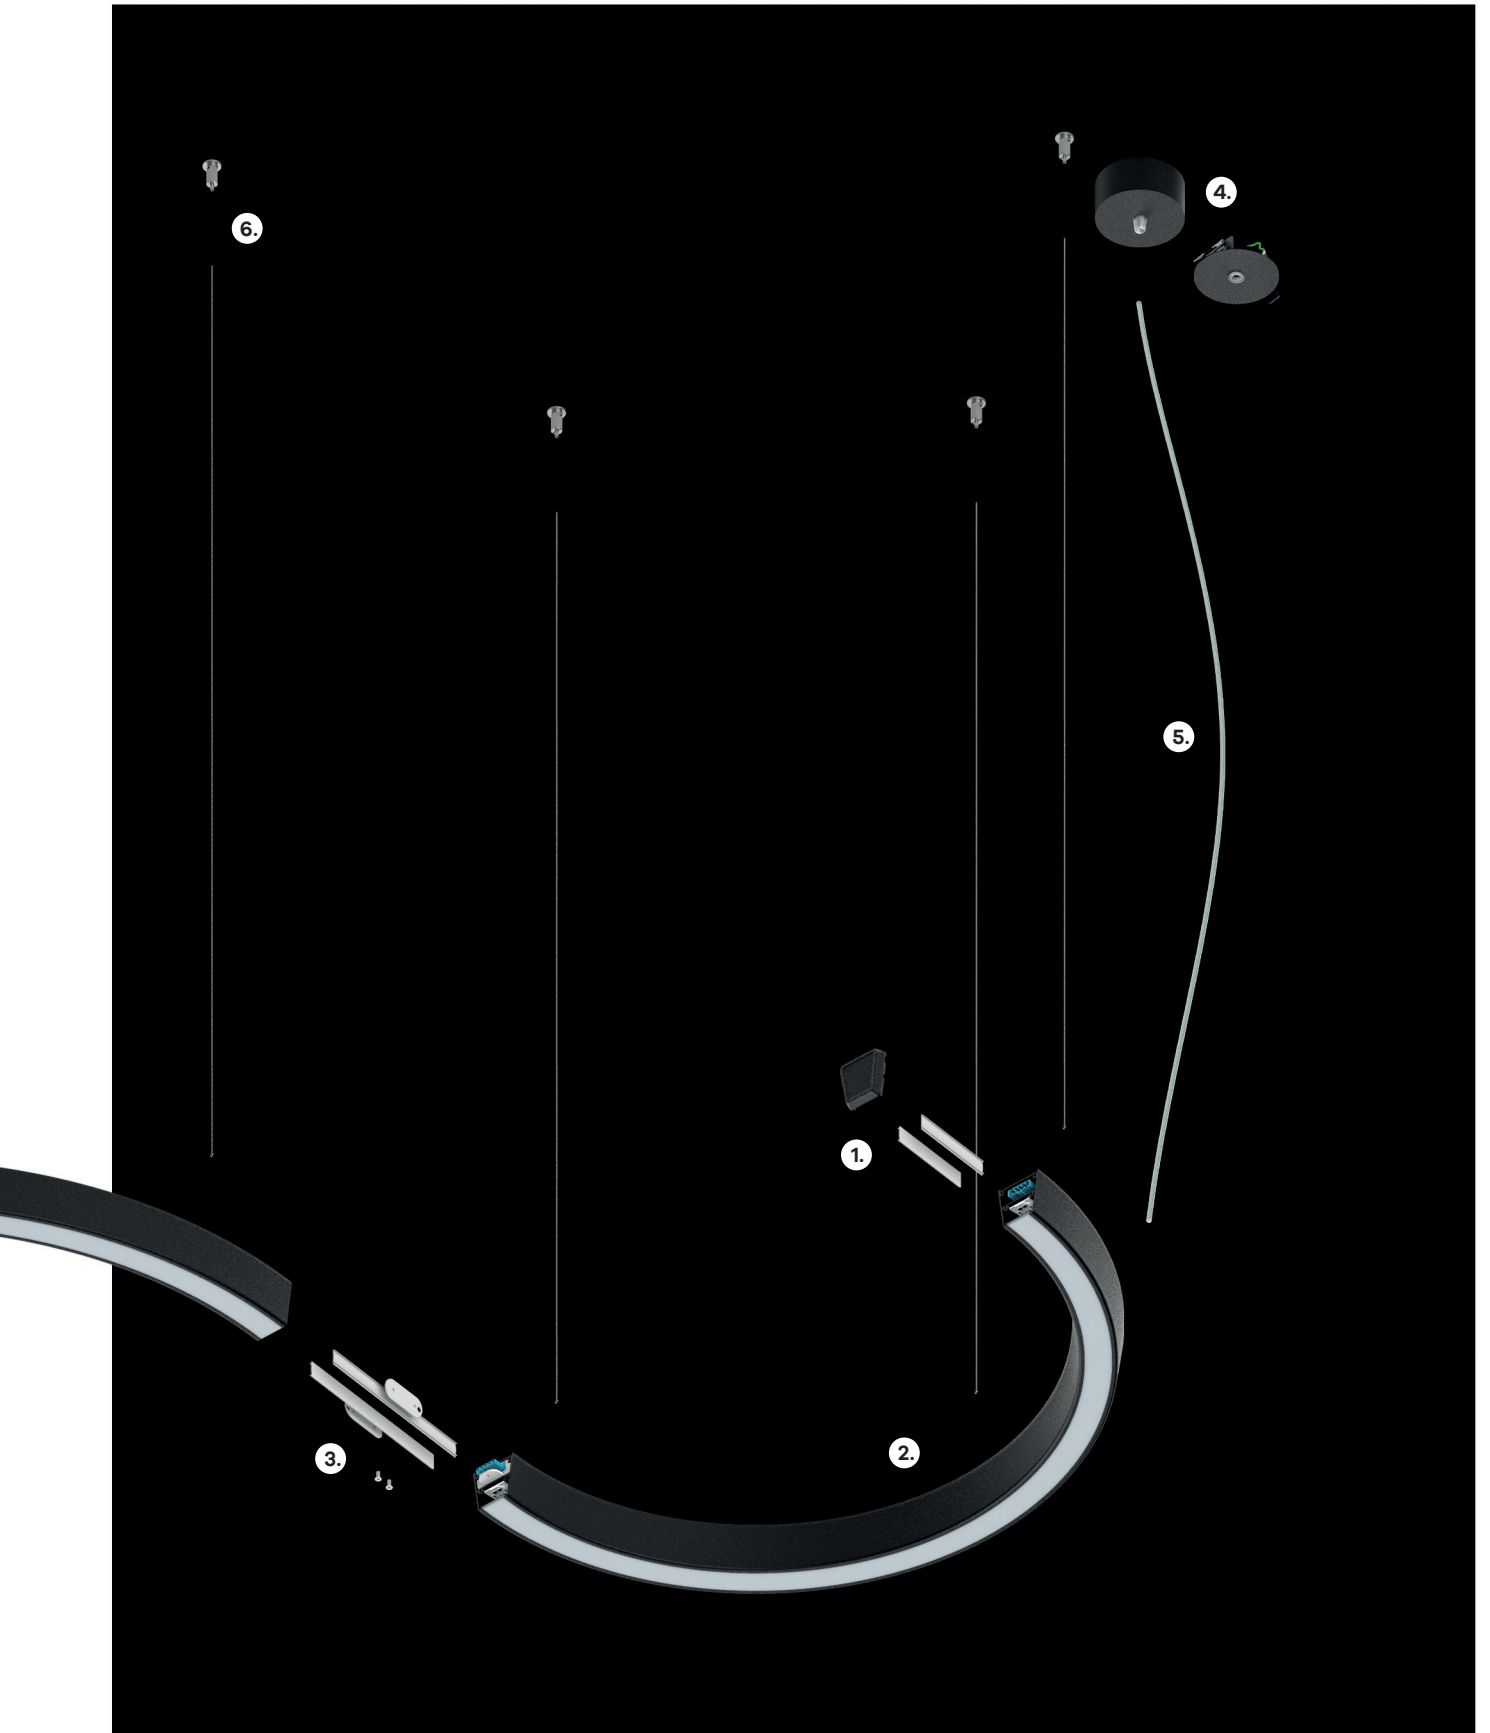


STRUCTURAL ELEMENTS COMPOSITION

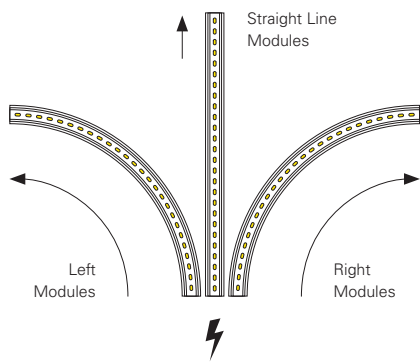

RECESSED

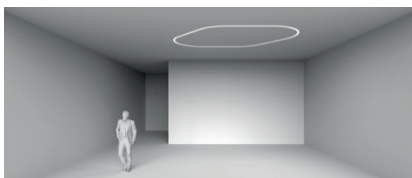


SURFACE OR WALL MOUNTED

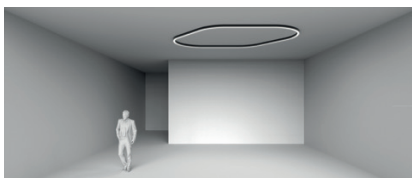


SUSPENDED




HOW TO ASSEMBLE A LINE

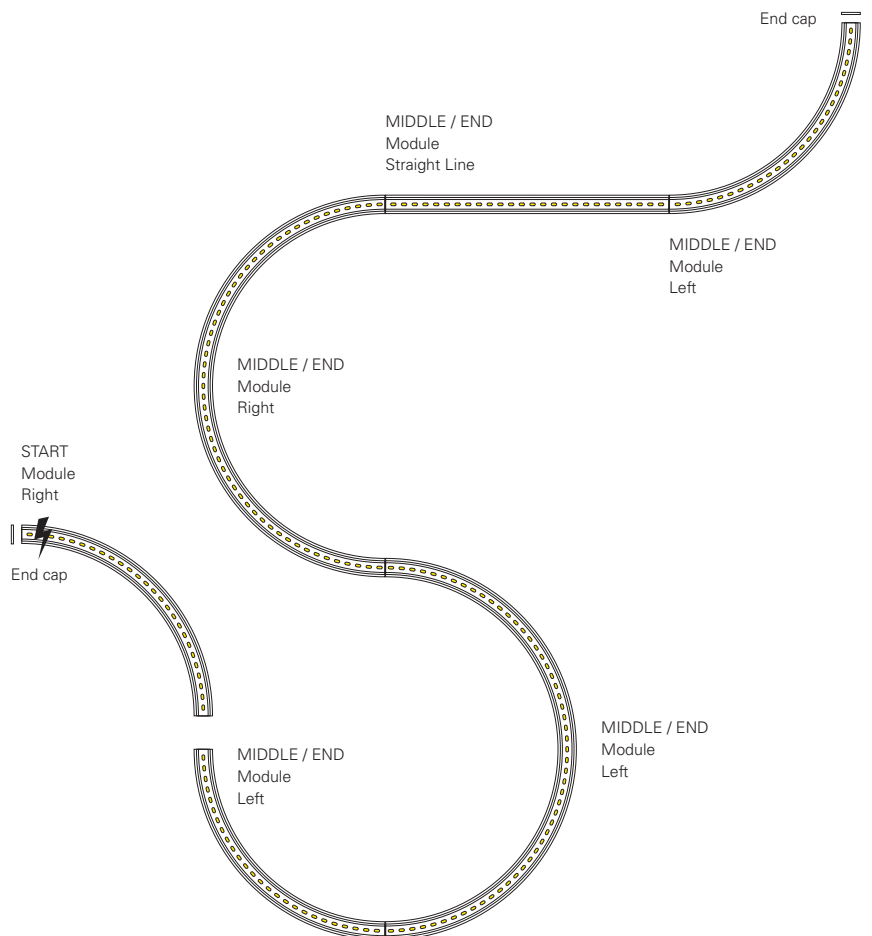

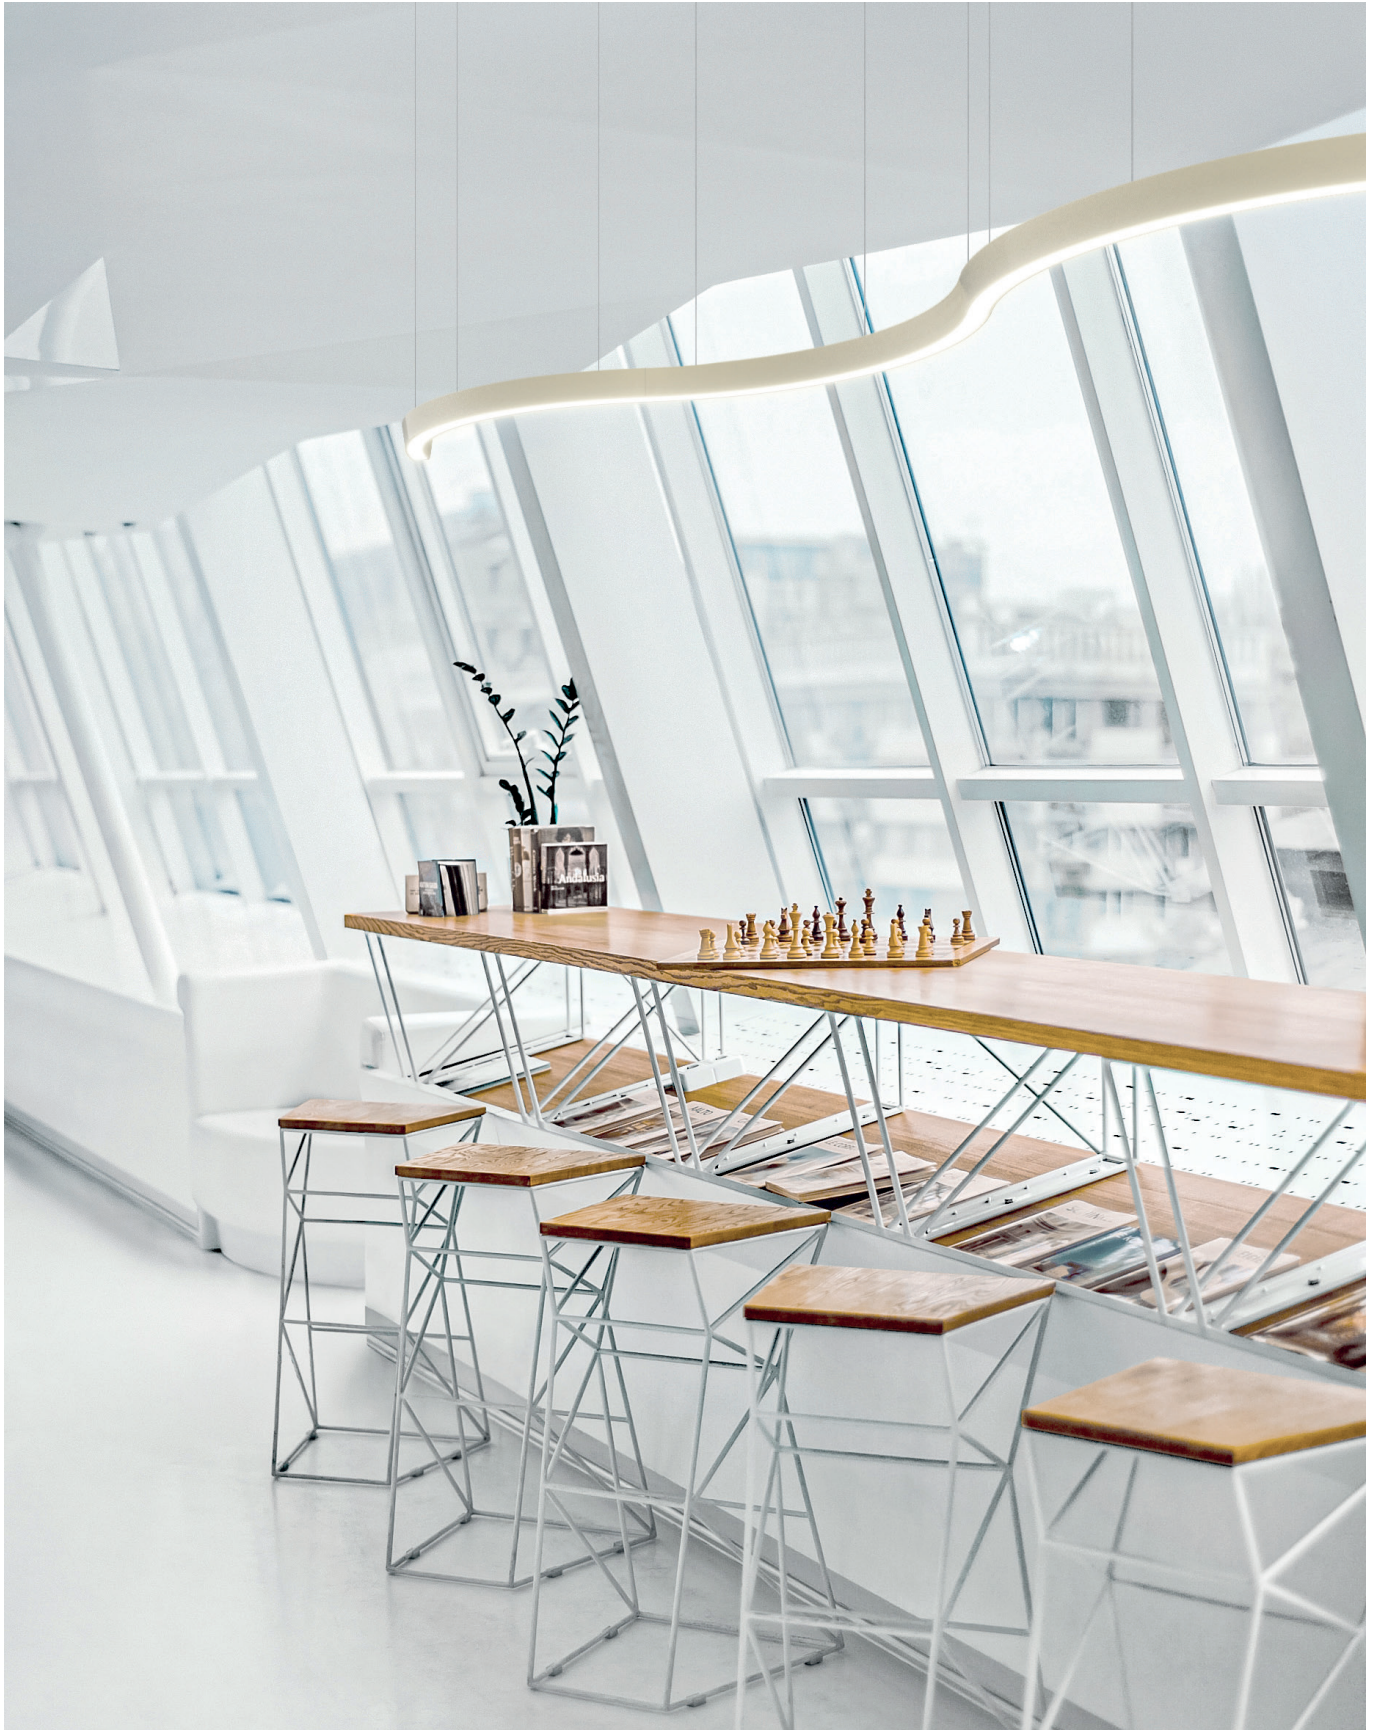

A RANGE OF INFINITE POSSIBILITIES

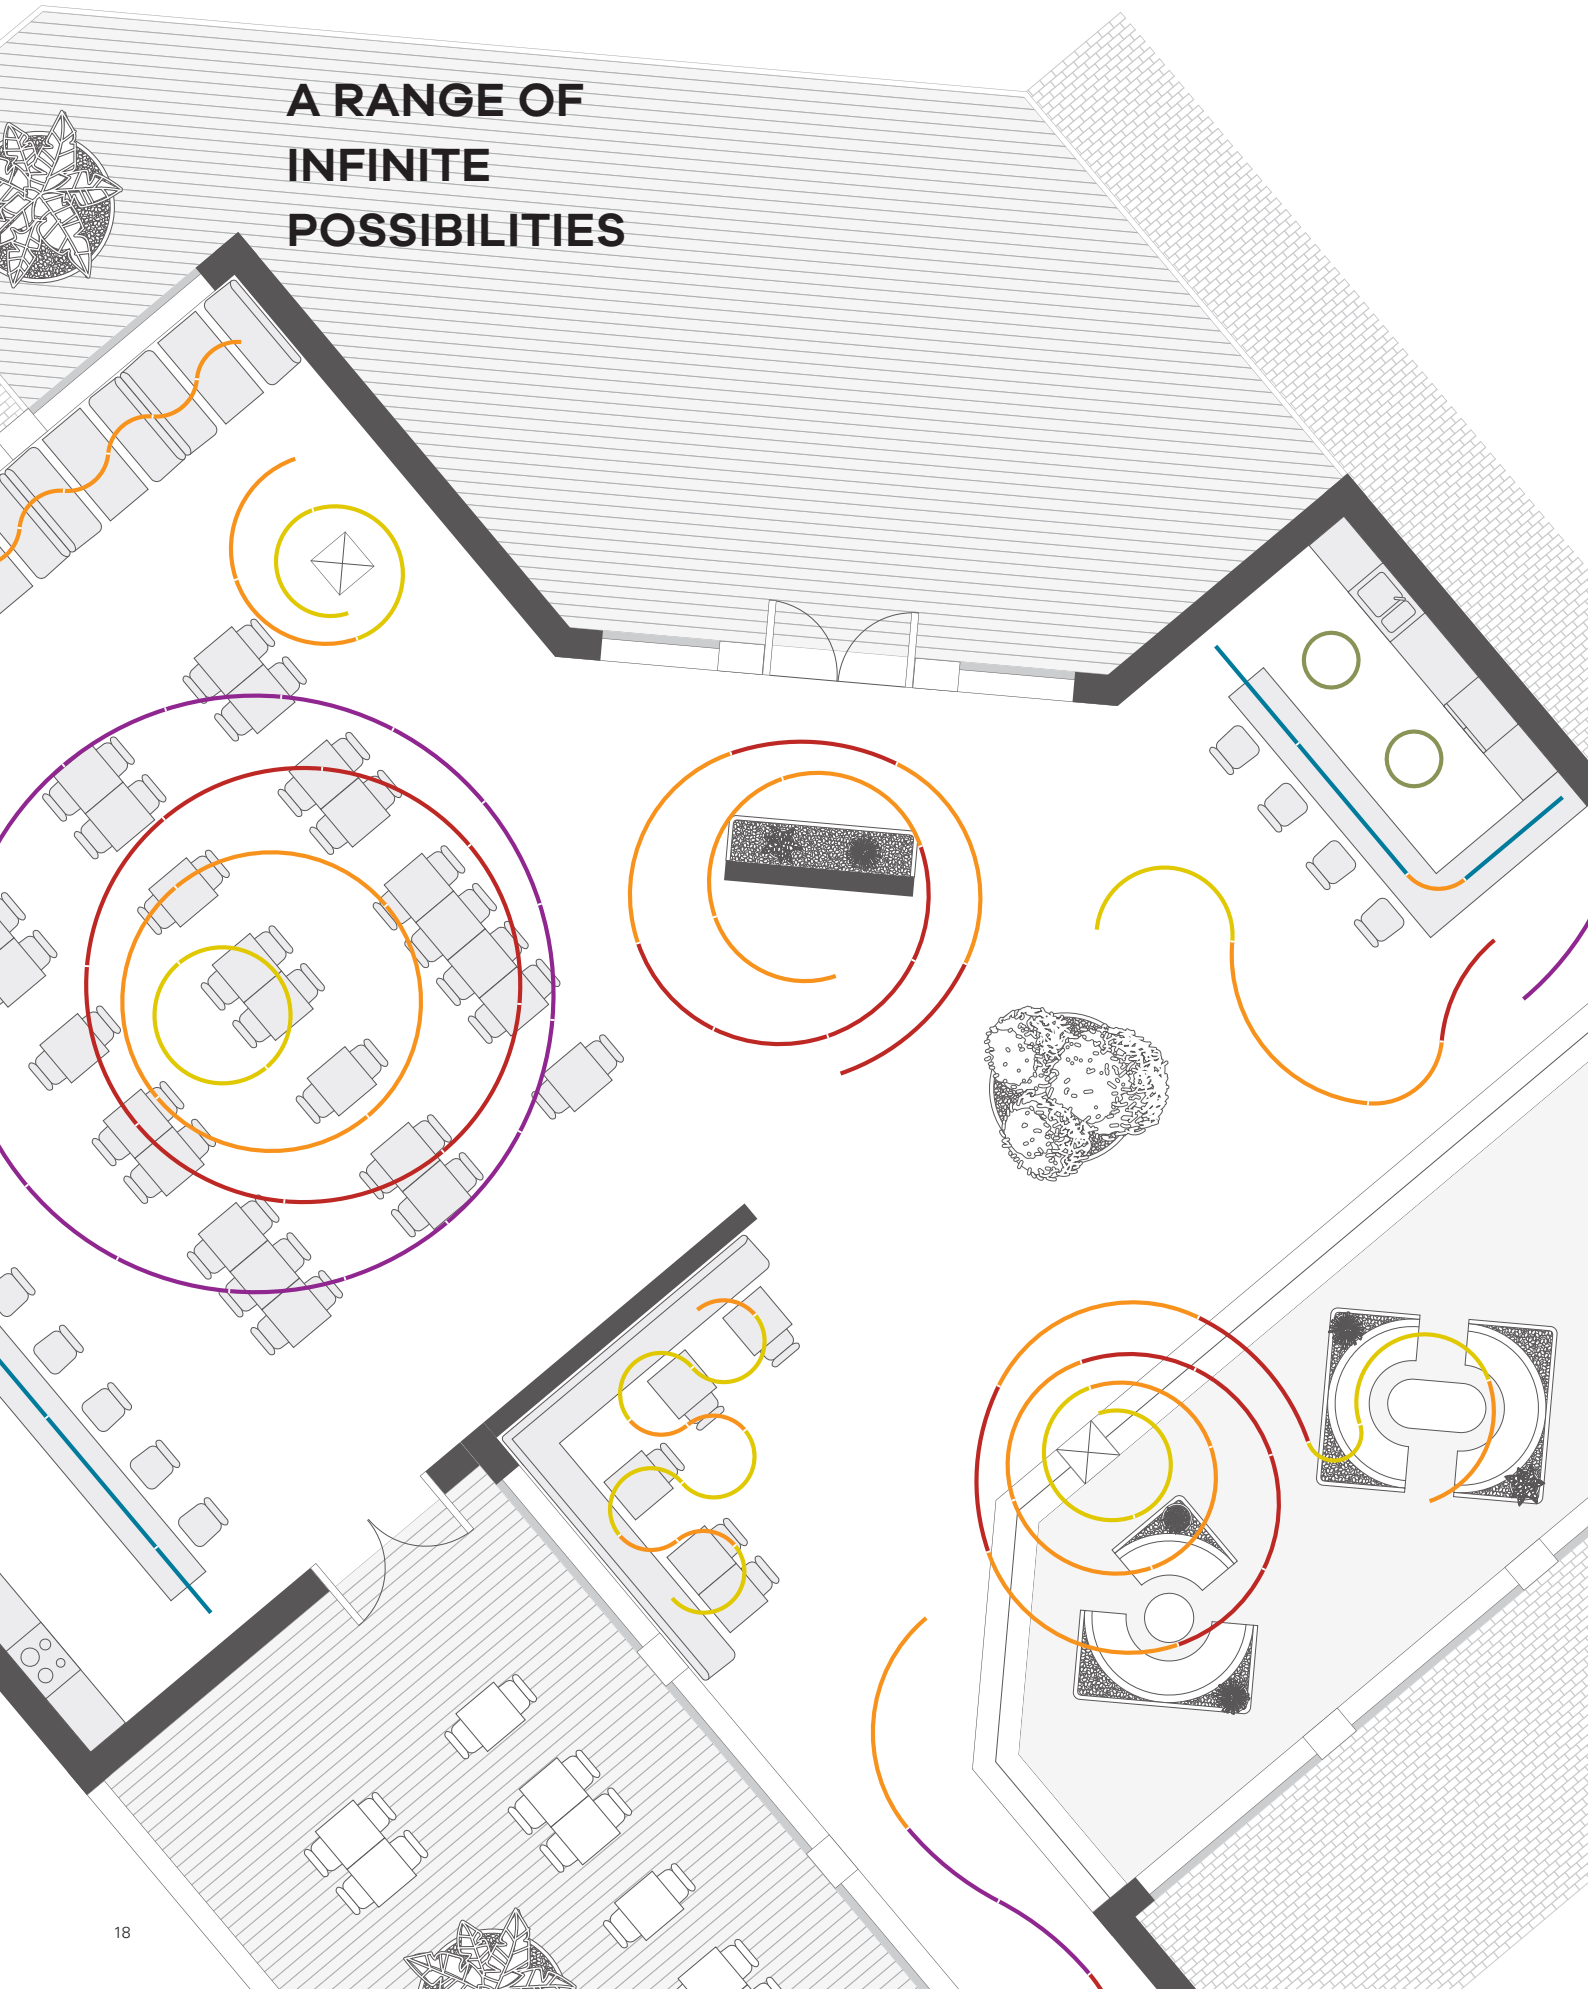

STRAIGHT LINE 1/16 (22,5°) 1/8 (45°) 1/4 (90°) 1/2 (180°) 1/1 (360°)




Straight Line

| | |
|---------|---|
| 843 mm | • |
| 1124 mm | • |
| 1405 mm | • |
| 1686 mm | • |
| 1967 mm | • |
| 2248 mm | • |
| 2529 mm | • |
| 2810 mm | • |

Circular

| | | | | |
|----------|---|---|---|---|
| Ø455 mm | | | | • |
| Ø777 mm | | | • | • |
| Ø1136 mm | | | • | • |
| Ø1494 mm | | | • | • |
| Ø1853 mm | | • | • | |
| Ø2569 mm | | • | • | |
| Ø2926 mm | | • | • | |
| Ø4000 mm | | • | • | |
| Ø5789 mm | | • | • | |
| Ø7936 mm | • | | | |

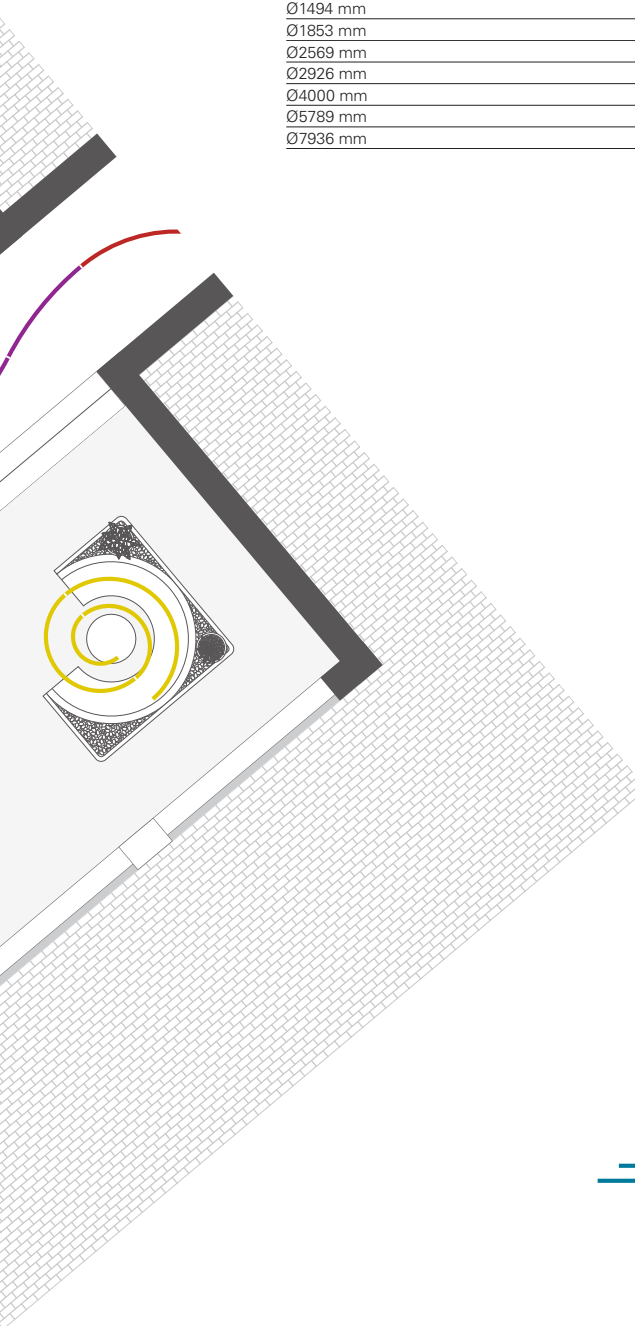

**AVAILABLE
MODULES**





Scale 1:100 1000mm

CIRCULAR RANGE




CHOOSE YOUR SIZE!

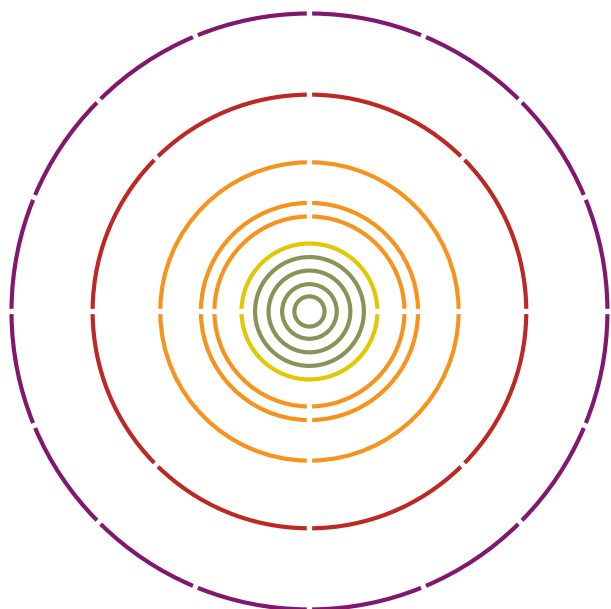

Scale 1:100 

COMPOSED
(multiple modules)

SINGLE
(single module)



**No. OF
MODULES**

**MODULES
VERSION**

**No. OF
SUSPENSIONS**


Diameter

| | | | |
|----------|----|--------------|----|
| Ø455 mm | 1 | 1/1 (360°) | 3 |
| Ø777 mm | 1 | 1/1 (360°) | 3 |
| Ø1136 mm | 1 | 1/1 (360°) | 4 |
| Ø1494 mm | 1 | 1/1 (360°) | 6 |
| Ø1853 mm | 2 | 1/2 (180°) | 6 |
| Ø2569 mm | 4 | 1/4 (90°) | 8 |
| Ø2926 mm | 4 | 1/4 (90°) | 12 |
| Ø4000 mm | 4 | 1/4 (90°) | 12 |
| Ø5789 mm | 8 | 1/8 (45°) | 24 |
| Ø7936 mm | 16 | 1/16 (22,5°) | 32 |





DEFINE YOUR COLOUR





DESIGN AND ELEGANCE



ACOUSTIC VERSION



ACOUSTIC MOSS

The acoustic moss can make spaces less noisy. It has excellent sound-absorbing and moisture control properties, helping dampen noise and improve working environments.



ACOUSTIC PANEL


The acoustic panel made from recycled PET plastic bottles has an excellent acoustic performance. The options are available in a variety of colours, perfect to match any surface.





CREATE YOUR OWN LIGHTING DESIGN IN A FASTER AND SMARTER WAY!



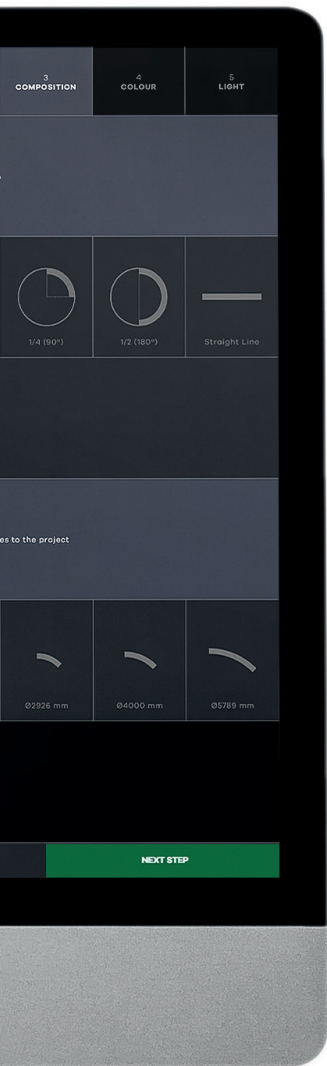

DISCOVER
THE NEW
CONCEPT 35
RANGE
CONFIGURATOR

CONFIGURATOR.INDELAGUEGROUP.COM



I N D E L A G U E G R O U P

HEADQUARTERS

INDÚSTRIA ELÉTRICA
DE ÁGUEDA S.A.
Rua da Mina 465 | Covão
Zona industrial EN1 Norte
3750-792 Trofa
ÁGUEDA | PORTUGAL
T. +351 234 612 310
indelague@indelague.pt

UNITED KINGDOM

ROXO LIGHTING LIMITED
roxo.london@roxolighting.com

SPAIN

INDELAGUE ESPAÑA, S.L.
Avenida del Ejército, nº 8 - 1º C
C.P. 15006 | A CORUÑA | ESPAÑA
comercial@indelague.com

All data contained in this brochure does not constitute any commitment to INDELAGUE - Indústria Eléctrica de Águeda, S.A. . The company itself, reserves the right to change or modify any information stated without prior notice. The reproduction of this brochure or any part of it is prohibited. Electric/Optical data are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/- 150 K. Unless stated otherwise, the technical data represent rated values for an ambient temperature of 25°C.

FIN023/0